
目录

前言	1.1
mitmproxy概述	1.2
mitmdump	1.3
下载	1.3.1
安装	1.3.2
Mac	1.3.2.1
Win	1.3.2.2
如何使用	1.3.3
通用逻辑	1.3.3.1
电脑端启动mitmdump	1.3.3.2
Mac	1.3.3.2.1
移动端安装根证书	1.3.3.3
iOS	1.3.3.3.1
Android	1.3.3.3.2
移动端给WiFi设置代理	1.3.3.4
常见问题	1.4
No module named yaml	1.4.1
traffic is not passing through mitmproxy	1.4.2
Cannot validate certificate hostname without SNI	1.4.3
sslv3 alert certificate unknown	1.4.4
-s时无法指定python版本	1.4.5
检测到代理显示异常	1.4.6
mitmdump偶尔突然无效	1.4.7
ssl3_get_record wrong version number	1.4.8
SysCallError 10054 WSAECONNRESET	1.4.9
其他	1.5
代码调用	1.5.1
打包exe	1.5.2
附录	1.6
help语法	1.6.1
参考资料	1.6.2

抓包代理利器：mitmproxy

- 最新版本： `v1.0`
- 更新时间： `20210114`

简介

介绍主要用于抓包领域的代理工具mitmproxy，尤其是常用的命令行版的mitmdump。先对mitmproxy概述，再介绍mitmdump的下载和安装。包括Mac和Win中如何安装和常见问题。接下来介绍如何使用mitmdump，包括核心的通用逻辑，即先电脑端启动mitmdump代理，再去移动端初始化安装mitmproxy的根证书ssl代理证书文件，其中总结了各种iOS和安卓手机在安装根证书时候的各种坑和问题及解决办法。再去介绍如何给移动端中WiFi去设置代理。总结了常见的问题，比如No module named yaml、if you can see this, traffic is not passing through mitmproxy、Cannot validate certificate hostname without SNI、ssl3_read_bytes sslv3 alert certificate unknown、-s时无法指定python版本、检测到代理显示异常、mitmdump偶尔突然无效、ssl3_get_record wrong version number、SysCallError 10054 WSAECONNRESET等等。还有其他方面，比如用代码控制mitmdump的运行、win中如何给mitmdump的python打包成exe。最后附上mitmdump、mitmproxy和mitmweb的help语法供需要时查阅。

源码+浏览+下载

本书的各种源码、在线浏览地址、多种格式文件下载如下：

Gitbook源码

- [crifan/crawler_proxy_tool_mimproxy](#): 抓包代理利器：mitmproxy

如何使用此Gitbook源码去生成发布为电子书

详见：[crifan/gitbook_template: demo how to use crifan gitbook template and demo](#)

在线浏览

- 抓包代理利器：[mitmproxy book.crifan.com](#)
- 抓包代理利器：[mitmproxy crifan.github.io](#)

离线下载阅读

- 抓包代理利器：[mitmproxy PDF](#)
- 抓包代理利器：[mitmproxy ePub](#)
- 抓包代理利器：[mitmproxy Mobi](#)

版权说明

此电子书教程的全部内容，如无特别说明，均为本人原创和整理。其中部分内容参考自网络，均已备注了出处。如有发现侵犯您的版权，请通过邮箱联系我 `admin` 艾特 `crifan.com`，我会尽快删除。谢谢合作。

鸣谢

感谢我的老婆陈雪的包容理解和悉心照料，才使得我 `crifan` 有更多精力去专注技术专研和整理归纳出这些电子书和技术教程，特此鸣谢。

更多其他电子书

本人 `crifan` 还写了其他 `100+` 本电子书教程，感兴趣可移步至：

[crifan/crifan_ebook_readme: Crifan的电子书的使用说明](#)

`crifan.com`，使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新：2021-01-17 13:03:20

mitmproxy概述


- mitmproxy
 - 名词解析
 - mitmproxy = mitm 的 proxy
 - mitm = MITM = Man-In-The-Middle
 - 直译：人在中间
 - 在中间 ->
 - 首先要确保原先网络请求能继续
 - 所以就是代理的功能：正常转发原有网络请求
 - 但也可以干很多事情
 - 比如
 - 记录、保存网络请求
 - 拦截（符合特定规则的）网络请求
 - （甚至）篡改、伪造成新的合法的或不合法的网络请求
 - 相关：往往也被叫做
 - Man-In-The-Middle attack = 中间人攻击
 - mitmproxy 是一套工具的总称，包含
 - mitmproxy：交互式命令行工具
 - 是什么=一句话概述
 - 英文
 - mitmproxy is an interactive, SSL/TLS-capable intercepting proxy with a console interface for HTTP/1, HTTP/2, and WebSockets
 - 中文
 - mitmproxy是一个代理工具
 - 功能和特点
 - 交互式的
 - 支持https拦截
 - 支持协议：HTTP/1、HTTP/2、WebSockets
 - 产品形态：控制台console中显示交互界面
 - 长什么样=截图

```

Flows
GET https://www.google.com/
  ↳ 200 text/html 64.52k 487ms
GET https://www.google.com/logos/doodles/2018/doodle-snow-games-day-12-6070619765473280-s.png
  ↳ 200 image/png 2.63k 184ms
GET https://www.google.com/logos/2018/snowgames_skijump/cta.png
  ↳ 200 image/png 13.4k 229ms
>> GET https://www.gstatic.com/external_hosted/createjs/createjs-2015.11.26.min.js
  ↳ 200 text/javascript 48.51k 475ms
GET https://ssl.gstatic.com/gb/images/i2_2ec824b0.png
  ↳ 200 image/png 23.64k 253ms
GET https://ssl.gstatic.com/safebrowsing/csd/client_model_v5_variation_0.pb
  ↳ 200 application/octet-stream 67.92k 356ms
GET https://ssl.gstatic.com/safebrowsing/csd/client_model_v5_ext_variation_0.pb
  ↳ 200 application/octet-stream 67.92k 412ms
GET https://www.google.com/logos/2018/snowgames_skijump/snowgames_skijump18.js
  ↳ 200 text/javascript 258.16k 900ms
POST https://www.google.com/gen_204?s=webaft&atyp=csi&ei=vCGLWr6uMskk0gTYs6yIAw&rt=wsrt.2615,aft.1379,prt.1379
  ↳ 204 text/html [no content] 379ms
GET https://www.gstatic.com/og/_/js/k=og.og2.en_US.ulHn0gNl16I.0/rt=j/m=def/exm=in,fot/d=1/ed=1/rs=AA2YrT
uVOKajN_
  ↳ 200 text/javascript 46.4k 265ms
GET https://www.google.com/xjs/_/js/k=xjs.s.en.zjivxe8fVgY.0/m=sx,sb,cdos,cr,elog,hsm,jsa,r,d,csi/am=wCL0
eMEByP8_
  ↳ 200 text/javascript 144.26k 368ms
GET https://www.google.com/xjs/_/js/k=xjs.s.en.zjivxe8fVgY.0/m=aa,abd,async,dvl,foot,fpe,ipv6,lu,m,mu,sf,
sonic,s_
  ↳ 200 text/javascript 30.54k 195ms
GET https://www.google.com/logos/2018/snowgames_skijump/main-sprite.png
  ↳ 200 image/png 13.4k 229ms
[14/36]
: replay.client [Flow]

```

- mitmweb : 基于命令行的带UI界面
 - 可以理解为: 网页版的mitmproxy
 - 是什么=一句话描述
 - mitmweb is a web-based interface for mitmproxy
 - 长什么样=截图

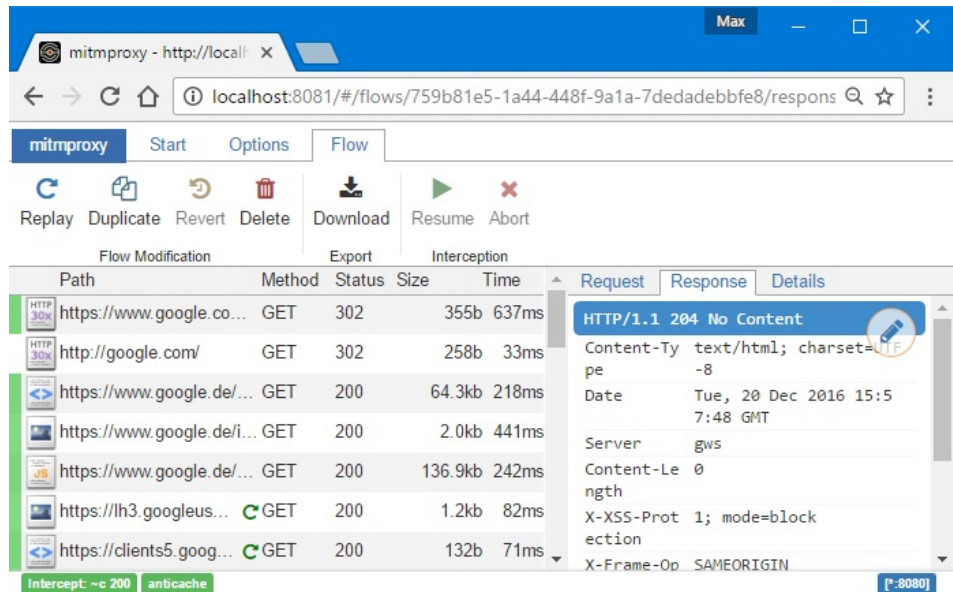

- mitmdump : 命令行版本
 - 是什么=一句话描述
 - mitmdump is the command-line version of mitmproxy. Think tcpdump for HTTP
 - 类比
 - mitmdump 之于 mitmproxy
 - 就像
 - tcpdump 之于 HTTP
 - 可以理解为
 - 命令行版本的 Charles / Fiddler
 - 主要用途: 实现对网页、app的抓包

- 网址
 - 官网文档
 - Introduction
 - <https://docs.mitmproxy.org/stable/>
 - GitHub
 - mitmproxy/mitmproxy: An interactive TLS-capable intercepting HTTP proxy for penetration testers and software developers
 - <https://github.com/mitmproxy/mitmproxy>

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

mitmdump

`mitmdump` 是 `mitmproxy` 的命令行版本。

`mitmproxy` 和 `mitmdump` 的用法和逻辑基本一致。


此处主要介绍 `mitmdump` 的使用。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

下载mitmproxy

官网下载地址：

- Downloads
 - <https://mitmproxy.org/downloads/#6.0.2/>

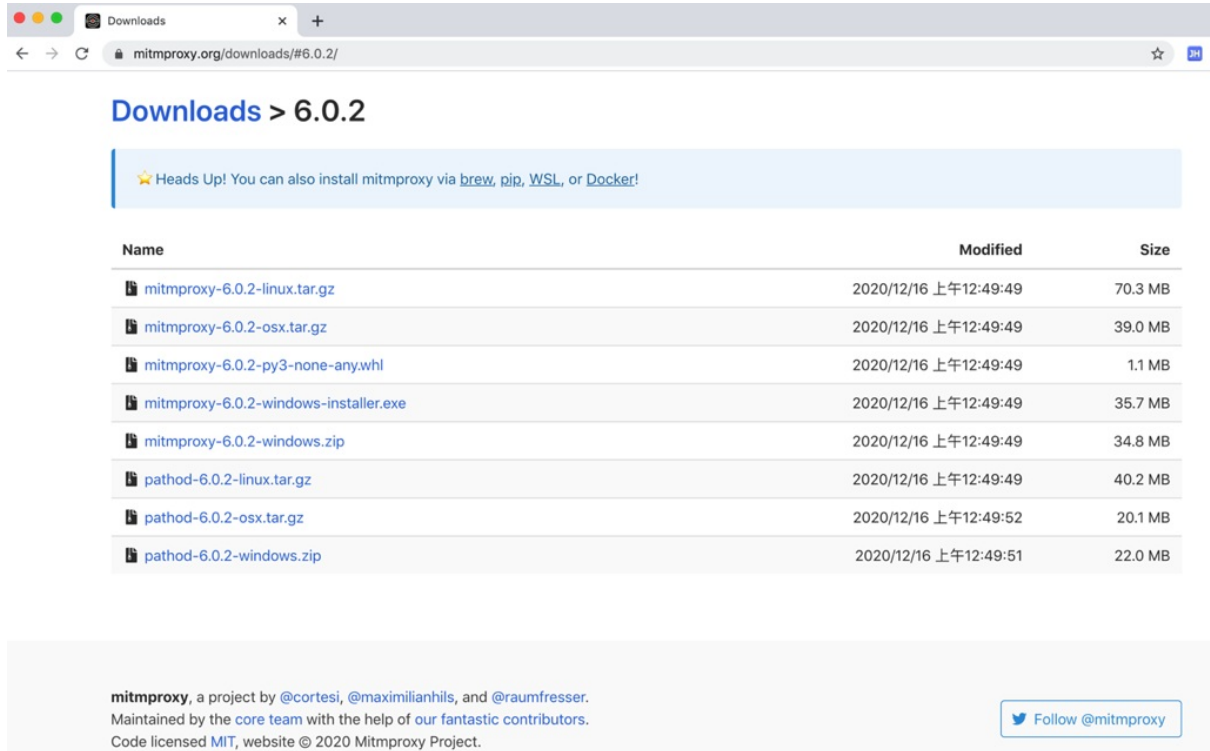

即可下载到对应系统的二进制可执行文件：

- Mac
 - <https://snapshots.mitmproxy.org/6.0.2/mitmproxy-6.0.2-osx.tar.gz>
- Win
 - <https://snapshots.mitmproxy.org/6.0.2/mitmproxy-6.0.2-windows-installer.exe>
 - <https://snapshots.mitmproxy.org/6.0.2/mitmproxy-6.0.2-windows.zip>
- Linux
 - <https://snapshots.mitmproxy.org/6.0.2/mitmproxy-6.0.2-linux.tar.gz>

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新： 2021-01-17 12:43:55

安装mitmproxy

下载到二进制文件后，（Mac、Win、Linux等）各个系统中，即可正常安装。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

Mac

Mac中也可以直接用 `brew` 去安装:

```
brew install mitmproxy
```

也可以用Python中的pip去（给Python环境中）安装:

```
pip install mitmproxy
```

注: 如果后续 `mitmdump` 用到 `-s` 去加载的 `.py` 的python脚本中, 用到了 `pyaml` 的话, 则记得要先用 `pip` 安装 `pyyaml` :

```
pip instal pyyaml
```

crifan.com, 使用[署名4.0国际\(CC BY 4.0\)协议](#)发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

Win

安装遇到的问题

之前在win10中安装mitmproxy, 遇到过2个问题:

build_openssl.c error C2065 X509_V_FLAG_CB_ISSUER_CHECK undeclared identifier

```
creating build\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release
C:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\BIN\x86_amd64\cl.exe /c /nologo /
Ox /W3 /GL /DNDEBUG /MD "-Ic:\program files\python38\include" "-Ic:\program files\python38
\include" "-IC:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\INCLUDE" "-IC:\Program
Files (x86)\Windows Kits\10\include\10.0.10240.0\ucrt" "-IC:\Program Files (x86)\Windows
Kits\8.1\include\shared" "-IC:\Program Files (x86)\Windows Kits\8.1\include\um" "-IC:\Prog
ram Files (x86)\Windows Kits\8.1\include\winrt" /Tcbuild\temp.win-amd64-3.8\Release\_opens
sl.c /Fobuild\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release\_openssl.obj
_openssl.c
build\temp.win-amd64-3.8\Release\_openssl.c(1369): warning C4098: 'Cryptography_HMAC_CTX
_free': 'void' function returning a value
build\temp.win-amd64-3.8\Release\_openssl.c(11095): error C2065: 'X509_V_FLAG_CB_ISSUER_
CHECK': undeclared identifier
build\temp.win-amd64-3.8\Release\_openssl.c(11096): error C2065: 'X509_V_FLAG_CB_ISSUER_
CHECK': undeclared identifier
build\temp.win-amd64-3.8\Release\_openssl.c(12429): warning C4013: 'ASN1_STRING_data' un
defined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(12429): warning C4047: 'return': 'unsigned c
har *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(12452): warning C4047: '=': 'unsigned char *'
differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(13565): warning C4090: 'return': different '
const' qualifiers
build\temp.win-amd64-3.8\Release\_openssl.c(13575): warning C4090: '=': different 'const'
qualifiers
build\temp.win-amd64-3.8\Release\_openssl.c(13589): warning C4090: 'return': different '
const' qualifiers
build\temp.win-amd64-3.8\Release\_openssl.c(13599): warning C4090: '=': different 'const'
qualifiers
build\temp.win-amd64-3.8\Release\_openssl.c(16441): warning C4013: 'CRYPTO_cleanup_all_e
x_data' undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(16465): warning C4013: 'CRYPTO_get_locking_c
allback' undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(16465): warning C4047: 'return': 'void (__cd
ecl *)(int,int,const char *,int)' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(16475): warning C4047: '=': 'void (__cdecl *
)(int,int,const char *,int)' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(16575): warning C4013: 'CRYPTO_num_locks' un
defined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(16599): warning C4013: 'CRYPTO_set_locking_c
```

```
allback' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(19290) : warning C4013: 'DTLSv1_client_method'
  undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(19290) : warning C4047: 'return': 'const SSL_
  METHOD *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(19300) : warning C4047: '=': 'const SSL_METHO
  D *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(19350) : warning C4013: 'DTLSv1_method' undef
  ined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(19350) : warning C4047: 'return': 'const SSL_
  METHOD *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(19360) : warning C4047: '=': 'const SSL_METHO
  D *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(19374) : warning C4013: 'DTLSv1_server_method'
  undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(19374) : warning C4047: 'return': 'const SSL_
  METHOD *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(19384) : warning C4047: '=': 'const SSL_METHO
  D *' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(22275) : warning C4013: 'ENGINE_cleanup' unde
  fined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(23380) : warning C4013: 'ENGINE_load_dynamic'
  undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(23404) : warning C4013: 'ENGINE_load_openssl'
  undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(25957) : warning C4013: 'EVP_CIPHER_CTX_clean
  up' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(26094) : warning C4013: 'EVP_CIPHER_CTX_init'
  undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(32153) : warning C4013: 'OBJ_cleanup' undefin
  ed; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(34129) : warning C4090: 'return': different '
  const' qualifiers
  build\temp.win-amd64-3.8\Release\_openssl.c(34152) : warning C4090: '=': different 'const'
  qualifiers
  build\temp.win-amd64-3.8\Release\_openssl.c(34609) : warning C4013: 'OPENSSL_config' unde
  fined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(34709) : warning C4013: 'OPENSSL_no_config' u
  ndefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(34793) : warning C4013: 'OpenSSL_add_all_algo
  rithms' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(38288) : warning C4013: 'RAND_cleanup' undefi
  ned; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(46480) : warning C4090: 'function': different
  'const' qualifiers
  build\temp.win-amd64-3.8\Release\_openssl.c(46520) : warning C4090: 'function': different
  'const' qualifiers
  build\temp.win-amd64-3.8\Release\_openssl.c(46713) : warning C4013: 'SSL_library_init' un
  defined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(46773) : warning C4013: 'SSL_load_error_strin
  gs' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(49146) : warning C4013: 'TLSv1_1_client_metho
  d' undefined; assuming extern returning int
```

```
build\temp.win-amd64-3.8\Release\_openssl.c(49146) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49156) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49170) : warning C4013: 'TLSv1_1_method' unde
fined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49170) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49180) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49194) : warning C4013: 'TLSv1_1_server_metho
d' undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49194) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49204) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49218) : warning C4013: 'TLSv1_2_client_metho
d' undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49218) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49228) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49242) : warning C4013: 'TLSv1_2_method' unde
fined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49242) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49252) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49266) : warning C4013: 'TLSv1_2_server_metho
d' undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49266) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49276) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49290) : warning C4013: 'TLSv1_client_method'
undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49290) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49300) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49314) : warning C4013: 'TLSv1_method' undefi
ned; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49314) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49324) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49338) : warning C4013: 'TLSv1_server_method'
undefined; assuming extern returning int
build\temp.win-amd64-3.8\Release\_openssl.c(49338) : warning C4047: 'return': 'const SSL_
METHOD *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(49348) : warning C4047: '=': 'const SSL_METHO
D *' differs in levels of indirection from 'int'
build\temp.win-amd64-3.8\Release\_openssl.c(50421) : warning C4013: 'X509_CRL_get_lastUpd
```

```
ate' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(50421): warning C4047: 'return': 'ASN1_OCTET
_STRING #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(50444): warning C4047: '=': 'ASN1_OCTET_STRI
NG #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(50457): warning C4013: 'X509_CRL_get_nextUpd
ate' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(50457): warning C4047: 'return': 'ASN1_OCTET
_STRING #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(50480): warning C4047: '=': 'ASN1_OCTET_STRI
NG #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(50659): warning C4013: 'X509_CRL_set_lastUpd
ate' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(50712): warning C4013: 'X509_CRL_set_nextUpd
ate' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(53826): warning C4013: 'X509_STORE_CTX_get_c
hain' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(53826): warning C4047: 'return': 'Cryptograp
hy_STACK_OF_X509 #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(53849): warning C4047: '=': 'Cryptography_ST
ACK_OF_X509 #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(54363): warning C4013: 'X509_STORE_CTX_set_c
hain' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(54620): warning C4013: 'X509_STORE_CTX_trust
ed_stack' undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(57001): warning C4013: 'X509_get_notAfter' u
ndefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(57001): warning C4047: 'return': 'ASN1_OCTET
_STRING #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(57024): warning C4047: '=': 'ASN1_OCTET_STRI
NG #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(57037): warning C4013: 'X509_get_notBefore'
undefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(57037): warning C4047: 'return': 'ASN1_OCTET
_STRING #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(57060): warning C4047: '=': 'ASN1_OCTET_STRI
NG #' differs in levels of indirection from 'int'
  build\temp.win-amd64-3.8\Release\_openssl.c(57500): warning C4013: 'X509_set_notAfter' u
ndefined; assuming extern returning int
  build\temp.win-amd64-3.8\Release\_openssl.c(57553): warning C4013: 'X509_set_notBefore'
undefined; assuming extern returning int
  error: command 'C:\\Program Files (x86)\\Microsoft Visual Studio 14.0\\VC\\BIN\\x86_amd6
4\\cl.exe' failed with exit status 2
-----
ERROR: Failed building wheel for cryptography
Running setup.py clean for cryptography
Failed to build cryptography
ERROR: Could not build wheels for cryptography which use PEP 517 and cannot be installed d
irectly
```

经过一番折腾，但最后是没解决。

具体过程详见：

- 【未解决】windows中pip安装mitmproxy报错： build_openssl.c error C2065 X509_V_FLAG_CB_ISSUER_CHECK undeclared identifier

ERROR: Could not build wheels for cryptography which use PEP 517 and cannot be installed directly

```
> pip install mitmproxy
.....
Collecting pycparser
  Using cached https://files.pythonhosted.org/packages/68/9e/49196946aee219aead1290e00d1e7fdeab8567783e83e1b9ab5585e6206a/pycparser-2.19.tar.gz
Building wheels for collected packages: cryptography
  Building wheel for cryptography (PEP 517) ... error
  ERROR: Command errored out with exit status 1:
   command: 'c:\program files\python38\python.exe' 'c:\program files\python38\lib\site-packages\pip\_vendor\pep517\_in_process.py' build_wheel 'C:\Users\xxx~1\AppData\Local\Temp\tmp38qbzr1q'
   cwd: C:\Users\xxx\AppData\Local\Temp\pip-install-x4h_xxr8\cryptography
  Complete output (112 lines):
  running bdist_wheel
  running build
  running build_py
  creating build
  creating build\lib.win-amd64-3.8
  creating build\lib.win-amd64-3.8\cryptography
  copying src\cryptography\exceptions.py -> build\lib.win-amd64-3.8\cryptography
  copying src\cryptography\fernet.py -> build\lib.win-amd64-3.8\cryptography
  copying src\cryptography\utils.py -> build\lib.win-amd64-3.8\cryptography
  copying src\cryptography\__about__.py -> build\lib.win-amd64-3.8\cryptography
  copying src\cryptography\__init__.py -> build\lib.win-amd64-3.8\cryptography
  creating build\lib.win-amd64-3.8\cryptography\hazmat
  copying src\cryptography\hazmat\_oid.py -> build\lib.win-amd64-3.8\cryptography\hazmat
  copying src\cryptography\hazmat\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat
  at
  creating build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\base.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\certificate_transparency.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\extensions.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\general_name.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\name.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\ocsp.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\oid.py -> build\lib.win-amd64-3.8\cryptography\x509
  copying src\cryptography\x509\__init__.py -> build\lib.win-amd64-3.8\cryptography\x509
  creating build\lib.win-amd64-3.8\cryptography\hazmat\backends
  copying src\cryptography\hazmat\backends\interfaces.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends
  copying src\cryptography\hazmat\backends\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends
```



```
creating build\lib.win-amd64-3.8\cryptography\hazmat\bindings
copying src\cryptography\hazmat\bindings\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\bindings
creating build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\cmac.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\constant_time.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\hashes.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\hmac.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\keywrap.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\mac.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\padding.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\serialization.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
copying src\cryptography\hazmat\primitives\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives
creating build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\aead.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\backend.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\ciphers.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\cmac.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\decode_asn1.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\dh.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\dsa.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\ec.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\encode_asn1.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\hashes.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\hmac.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\ocsp.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\rsa.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\utils.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\x25519.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
```

```
copying src\cryptography\hazmat\backends\openssl\x509.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
copying src\cryptography\hazmat\backends\openssl\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\backends\openssl
creating build\lib.win-amd64-3.8\cryptography\hazmat\bindings\openssl
copying src\cryptography\hazmat\bindings\openssl\binding.py -> build\lib.win-amd64-3.8\cryptography\hazmat\bindings\openssl
copying src\cryptography\hazmat\bindings\openssl\_conditional.py -> build\lib.win-amd64-3.8\cryptography\hazmat\bindings\openssl
copying src\cryptography\hazmat\bindings\openssl\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\bindings\openssl
creating build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\dh.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\dsa.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\ec.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\padding.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\rsa.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\utils.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\x25519.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
copying src\cryptography\hazmat\primitives\asymmetric\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\asymmetric
creating build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
copying src\cryptography\hazmat\primitives\ciphers\aead.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
copying src\cryptography\hazmat\primitives\ciphers\algorithms.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
copying src\cryptography\hazmat\primitives\ciphers\base.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
copying src\cryptography\hazmat\primitives\ciphers\modes.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
copying src\cryptography\hazmat\primitives\ciphers\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\ciphers
creating build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\concatkdf.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\hkdf.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\kbkdf.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\pbkdf2.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\scrypt.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\x963kdf.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\kdf
copying src\cryptography\hazmat\primitives\kdf\__init__.py -> build\lib.win-amd64-3.8\c
```

```

yptography\hazmat\primitives\kdf
  creating build\lib.win-amd64-3.8\cryptology\hazmat\primitives\twofactor
  copying src\cryptology\hazmat\primitives\twofactor\hotp.py -> build\lib.win-amd64-3.8\
cryptology\hazmat\primitives\twofactor
  copying src\cryptology\hazmat\primitives\twofactor\totp.py -> build\lib.win-amd64-3.8\
cryptology\hazmat\primitives\twofactor
  copying src\cryptology\hazmat\primitives\twofactor\utils.py -> build\lib.win-amd64-3.8
\cryptology\hazmat\primitives\twofactor
  copying src\cryptology\hazmat\primitives\twofactor\__init__.py -> build\lib.win-amd64-
3.8\cryptology\hazmat\primitives\twofactor
  running egg_info
  writing src\cryptology.egg-info\PKG-INFO
  writing dependency_links to src\cryptology.egg-info\dependency_links.txt
  writing requirements to src\cryptology.egg-info\requires.txt
  writing top-level names to src\cryptology.egg-info\top_level.txt
  reading manifest file 'src\cryptology.egg-info\SOURCES.txt'
  reading manifest template 'MANIFEST.in'
  no previously-included directories found matching 'docs\_build'
  warning: no previously-included files matching '*' found under directory 'vectors'
  writing manifest file 'src\cryptology.egg-info\SOURCES.txt'
  running build_ext
  generating cffi module 'build\temp.win-amd64-3.8\Release\_padding.c'
  creating build\temp.win-amd64-3.8
  creating build\temp.win-amd64-3.8\Release
  generating cffi module 'build\temp.win-amd64-3.8\Release\_constant_time.c'
  generating cffi module 'build\temp.win-amd64-3.8\Release\_openssl.c'
  building '_openssl' extension
  creating build\temp.win-amd64-3.8\Release\build
  creating build\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8
  creating build\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release
  C:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\BIN\x86_amd64\cl.exe /c /nologo /
Ox /W3 /GL /DNDEBUG /MD "-Ic:\program files\python38\include" "-Ic:\program files\python38
\include" "-IC:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\INCLUDE" "-IC:\Program
Files (x86)\Windows Kits\10\include\10.0.10240.0\ucrt" "-IC:\Program Files (x86)\Windows
Kits\8.1\include\shared" "-IC:\Program Files (x86)\Windows Kits\8.1\include\um" "-IC:\Prog
ram Files (x86)\Windows Kits\8.1\include\winrt" /Tcbuild\temp.win-amd64-3.8\Release\_opens
sl.c /Fobuild\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release\_openssl.obj
  _openssl.c
  build\temp.win-amd64-3.8\Release\_openssl.c(498): fatal error C1083: Cannot open include
file: 'openssl/opensslv.h': No such file or directory
  error: command 'C:\\Program Files (x86)\\Microsoft Visual Studio 14.0\\VC\\BIN\\x86_amd6
4\\cl.exe' failed with exit status 2
  -----
  ERROR: Failed building wheel for cryptography
  Running setup.py clean for cryptography
  Failed to build cryptography
  ERROR: Could not build wheels for cryptography which use PEP 517 and cannot be installed d
irectly

```

也试了:

```
pip install cryptography
```

但问题依旧。

以及：

```
python -m pip install --no-use-pep517 mitmproxy
```

但报其他错误：

```

copying src\cryptography\hazmat\primitives\twofactor\__init__.py -> build\lib.win-amd64-3.8\cryptography\hazmat\primitives\twofactor
running egg_info
writing src\cryptography.egg-info\PKG-INFO
writing dependency_links to src\cryptography.egg-info\dependency_links.txt
writing requirements to src\cryptography.egg-info\requires.txt
writing top-level names to src\cryptography.egg-info\top_level.txt
reading manifest file 'src\cryptography.egg-info\SOURCES.txt'
reading manifest template 'MANIFEST.in'
no previously-included directories found matching 'docs\_build'
warning: no previously-included files matching '*' found under directory 'vectors'
writing manifest file 'src\cryptography.egg-info\SOURCES.txt'
running build_ext
generating cffi module 'build\temp.win-amd64-3.8\Release\_padding.c'
creating build\temp.win-amd64-3.8
creating build\temp.win-amd64-3.8\Release
generating cffi module 'build\temp.win-amd64-3.8\Release\_constant_time.c'
generating cffi module 'build\temp.win-amd64-3.8\Release\_openssl.c'
building '_openssl' extension
creating build\temp.win-amd64-3.8\Release\build
creating build\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8
creating build\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release
C:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\BIN\x86_amd64\cl.exe /c /nologo /Ox /W3 /GL /DNDEBUG /MD "-IC:\Program Files\Python38\include" "-IC:\Program Files\Python38\include" "-IC:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\INCLUDE" "-IC:\Program Files (x86)\Windows Kits\10\include\10.0.10240.0\ucrt" "-IC:\Program Files (x86)\Windows Kits\8.1\include\shared" "-IC:\Program Files (x86)\Windows Kits\8.1\include\um" "-IC:\Program Files (x86)\Windows Kits\8.1\include\winrt" /Tcbuild\temp.win-amd64-3.8\Release\_openssl.c /Fobuild\temp.win-amd64-3.8\Release\build\temp.win-amd64-3.8\Release\_openssl.obj _openssl.c
build\temp.win-amd64-3.8\Release\_openssl.c(498): fatal error C1083: Cannot open include file: 'openssl/opensslv.h': No such file or directory
error: command 'C:\Program Files (x86)\Microsoft Visual Studio 14.0\VC\BIN\x86_amd64\cl.exe' failed with exit status 2
-----
Rolling back uninstall of cryptography
Moving to c:\program files\python38\lib\site-packages\cryptography-2.8.dist-info\
from C:\Program Files\Python38\Lib\site-packages\~ryptography-2.8.dist-info
Moving to c:\program files\python38\lib\site-packages\cryptography\
from C:\Program Files\Python38\Lib\site-packages\~ryptography
ERROR: Command errored out with exit status 1: 'C:\Program Files\Python38\python.exe' -u -c 'import sys, setuptools, tokenize; sys.argv[0] = '"'"'C:\\Users\\xxx\\AppData\\Local\\Temp\\pip-install-wkntcchc\\cryptography\\setup.py'"'"'; __file__ = '"'"'C:\\Users\\xxx\\AppData\\Local\\Temp\\pip-install-wkntcchc\\cryptography\\setup.py'"'"'; f=getattr(tokenize, '"'"'

```

```
'open''''', open)(__file__);code=f.read().replace(''''\n''', '''\n''');f.close();  
exec(compile(code, __file__, '''exec'''))' install --record 'C:\Users\xxx\AppData\Loca  
l\Temp\pip-record-dqgnm_3i\install-record.txt' --single-version-externally-managed --compi  
le Check the logs for full command output.
```

以及其他折腾。

但最后是没解决。

具体过程详见：

- **【未解决】** windows中pip install mitmproxy失败：ERROR Could not build wheels for cryptography which use PEP 517 and cannot be installed directly

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新：2021-01-17 12:43:55

如何使用

在（Mac、Win等）PC端安装了mitmproxy后，自带mitmdump。

此处介绍如何去使用mitmdump。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

通用逻辑

核心的通用逻辑是：

- 电脑端
 - 启动 mitmdump 代理
- 移动端
 - （初始化，只需第一次）安装 mitmproxy 的根证书
 - 给WiFi设置（PC端的mitmdump的）代理

即可正常使用代理，实现给移动端抓包等功能。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新：2021-01-17 12:43:55

电脑端启动mitmdump代理

比如，PC端运行对应命令：

```
mitmdump -k -p 8081 -s middleware/Save1.py
```

即可。

接下来分不同平台详细介绍具体细节。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

Mac

接着介绍，如何在 Mac 中使用 mitmdump

举例：

Mac 中终端去运行：

```
mitmdump -k -p 8081 -s middleware/Save1.py
```

启动mitmdump的代理

然后给手机端加上此处Mac的mitmdump的代理

即可实现：脚本 Save1.py 把手机端发出的所有的 url = 请求 = 链接地址（还可以根据自己需要做一定过滤处理后再）保存起来（比如保存到一个文件中），供后续使用。

说明

此处的Save1.py是个python脚本

具体内容：

```
# -*- coding: utf-8 -*-

import json
import re
import os
import sys
# print("sys.executable=%s" % sys.executable)

try:
    import yaml
except Exception as err:
    print("Failed to import yaml: %s" % err)

class Saver:

    def __init__(self):
        self.Allurls = set()
        self.DataFilePath = self.get_DataFilePath()
        self.REMOVED = self.get_NeedSkip()

    def get_DataFilePath(self):
        # SavePath = "./middleware/Save.json"
        SavePath = os.path.join("middleware", "Save.json")
        with open(SavePath, "r", encoding="utf-8") as f:
            text = f.read()
```

```
        data = json.loads(text)
        return data["1"]

def get_NeedSkip(self):
    # filepath = "./middleware/config.yml"
    filepath = os.path.join("middleware", "config.yml")
    try:
        with open(filepath, "r", encoding="utf-8") as f:
            text = f.read()
    except Exception:
        with open(filepath, "r") as f:
            text = f.read()
    config = yaml.load(text)
    REMOVED = [item.replace('.', '\\.') for item in config["skip"]]
    return "|".join(REMOVED)

def get_ContentType(self, headers):
    ContentType = "None"
    patten = "b'Accept', b'(.*)'"
    result = re.search(patten, headers)
    if result:
        ContentType = result.group(1)
        ContentType = ContentType.split(",")[0]
    return ContentType if not "*" in ContentType else "None"

def request(self, flow):
    url = flow.request.url
    ContentType = self.get_ContentType(str(flow.request.headers))
    if not url in self.Allurls and not re.search(self.REMOVED, url):
        self.Allurls.add(url)
        print(url)
        with open(self.DataFilePath, "a", encoding="utf-8") as f:
            f.write(url + "|" + ContentType)
            f.write('\n')

addons = [Saver()]
```

若想要后台运行，则后面加 &

```
mitmdump -k -p 8081 -s middleware/Save1.py &
```

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

移动端安装mitmproxy根证书

通用逻辑

即给移动端手机中安装 mitmproxy 的

SSL代理证书 = ssl证书 = 根证书 = root CA

核心逻辑：

- 手机中浏览器中打开 <http://mitm.it>
- 然后根据提示去下载（ pem 或 crt ）证书（文件）
- 点击安装证书文件

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新： 2021-01-17 12:43:55

iOS

此处整理iOS的iPhone手机中，安装mitmproxy的根证书的详细情况：

- iOS
 - iPhone
 - 详见
 - **【已解决】** 给iPhone添加mitmproxy的mitmdump代理用于保存抓包链接到文件
 - **【已解决】** iPhone8P中安装mitmproxy的CA的ssl证书

crifan.com, 使用[署名4.0国际\(CC BY 4.0\)协议](#)发布 all right reserved, powered by Gitbook最后更新：2021-01-17 12:43:55

Android

此处整理安卓手机中，安装mitmproxy的根证书，对于不同手机的详细情况：

- Android
 - 华为
 - 荣耀
 - 【记录】给安卓手机中安装mitmproxy代理的SSL证书
 - 【记录】给自动抓包工具的安卓手机设置mitmproxy代理用于能抓包到链接地址
 - 小米
 - 小米9
 - 相关
 - 【已解决】安卓手机小米9中安装mitmproxy的SSL代理证书
 - 【无需解决】小米9中WLAN或WAPI证书中找不到mitmproxy的SSL的pem证书文件
 - 【无法解决】小米9中用ES文件管理器安装pem证书
 - 红米Note8Pro
 - 问题
 - 用微信或小米浏览器无法下载pem证书文件
 - 解决办法：
 - 换QQ浏览器就可以正常下载pem证书文件 mitmproxy-ca-cert.pem
 - 细节
 - 不能用：
 - 微信
 - 点击Android无反应
 - 小米浏览器
 - 点击Android，弹框下载：perm.crt
 - 而不是希望的：mitmproxy-ca-cert.pem
 - 关键是：始终无法下载成功
 - 只能用：QQ浏览器
 - 点击Android，可以弹框下载：mitmproxy-ca-cert.pem
 - 是我们希望的pem证书
 - 也可以正常（瞬间）下载完毕
 - 详见
 - 【无法解决】红米Note8Pro中用微信或小米浏览器下载mitmproxy的SSL代理证书
 - 【已解决】红米Note8Pro中用QQ浏览器下载mitmproxy的Android的SSL代理证书
 - 相关
 - 【已解决】红米Note8Pro中安装mitmproxy的SSL代理证书
 - 红米10X
 - 问题：下载证书失败
 - 自带小米浏览器

- 可弹框下载pem.crt, 但下载失败
- QQ浏览器
 - 可弹框下载mitmproxy-ca-cert.pem, 但下载失败
 - 偶然甚至会提示:
 - if you can see this, traffic is not passing through mitmproxy
- UC浏览器
 - 可弹框下载mitmproxy-ca-cert.pem, 但下载失败
 - 偶然甚至会提示:
 - if you can see this, traffic is not passing through mitmproxy
- 解决办法:
 - 试了多次, 最后终于:
 - UC浏览器
 - 可弹框并成功下载mitmproxy-ca-cert.pem
- 详见:
 - **【已解决】** 红米10X安卓手机中无法下载mitmproxy的证书文件
- Vivo
 - iQOO U1x
 - 用QQ浏览器无法下载pem文件, 提示下载失败
 - 解决办法: 换Vivo的内置浏览器, 即可下载 mitmproxy-ca-cert.pem
 - 直接点击pem证书文件, 无法安装: 未找到证书文件
 - 问题现象
 - QQ浏览器下载到mitmproxy-ca-cert.pem, 直接点击提示: 找不到对应程序打开该文件
 - 更多安全设置->从手机存储和SD卡安装, 点击提示: 未找到证书文件
 - 从文件管理中点击已下载的mitmproxy-ca-cert.pem, 选 证书安装程序, 也提示: 未找到证书文件
 - 原因: Vivo不支持pem证书文件, 只支持crt证书文件
 - 解决办法: 把文件pem后缀改为crt
 - 点击即可正常安装
 - 详见:
 - **【已解决】** 给安卓手机ViVo的iQOO U1x下载和安装mitmproxy的SSL代理证书
 - **【已解决】** 安卓手机Vivo的iQOO U1x中手动安装mitmproxy-ca-cert.pem证书文件
 - **【已解决】** 安卓手机Vivo的iQOO U1x中点击安装mitmproxy的pem证书报错: 未找到证书文件
 - **【未解决】** 给安卓手机Vivo的iQOO U1x初始化mitmdump的代理环境

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

移动端给WiFi设置代理

之后再给移动端的WiFi设置（PC端的mitmdump的）代理（信息）。

- 细节详见
 - [如何添加代理 移动端 · 网络中转站：代理技术](#)

此处简单举例如下：

iOS

iPhone



crifan.com, 使用[署名4.0国际\(CC BY 4.0\)协议](#)发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

常见问题

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

No module named yaml

- 现象

Mac中用brew安装了mitmproxy，然后去运行：

```
mitmdump -p 8081 -s middleware/Save1.py
```

但是报错：

```
No module named yaml
```

- 原因

Mac中通过brew安装的mitmproxy，会调用自己内部安装的python（此处是3.7.5）

而不是Mac中自己Python（2.7或3.8），mac中的python中都安装过yaml了

而mitmproxy中python，没有安装过yaml，所以上述脚本会报错。

- 解决办法

不要用brew安装，而是用系统中的python的pip去安装mitmproxy

```
pip install mitmproxy
```

注：系统中的python是，此处是用的3.8，用pyenv设置全局为3.8

另外此处2.7的python中，pip安装mitmproxy会失败。

之后即可正常调用

```
mitmdump -p 8081 -s middleware/Save1.py
```

其中python解析器用的是此处系统的python了，因此可以正常找到（系统中python中已安装的）yaml，而不会报错了。

具体细节详见：

- **【基本解决】** Mac中mitmdump运行命令报错：in script py No module named yaml

crifan.com，使用署名4.0国际(CC BY 4.0)协议发布 all right reserved，powered by Gitbook最后更新：2021-01-17 12:43:55

if you can see this, traffic is not passing through mitmproxy

- 现象

手机中浏览器打开 <http://mitm.it> 后，看到页面提示：

```
if you can see this, traffic is not passing through mitmproxy
```

- 原因

需要你手机中WiFi加上PC端的mitmproxy (mitmdump) 的代理后，打开 <http://mitm.it> 后才能正常显示页面

- 解决办法

- PC端 (Mac) 中启动mitmproxy的代理

- 举例

- `mitmdump -k -p 8081 -s middleware/Save1.py`

- 然后再给手机端的当前WiFi中加上对应的mitmdump的代理

细节详见：

【已解决】 红米Note8Pro中去下载mitmproxy证书提示：if you can see this, traffic is not passing through mitmproxy

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

Cannot validate certificate hostname without SNI

此处通过：

```
mitmdump -k -p 8081 -s middleware/Save1.py
```

加上了

- `-k == --ssl-insecure`
 - Do not verify upstream server SSL/TLS certificates

从而规避了：

```
TlsException('Cannot validate certificate hostname without SNI
```

的问题。

- 细节详见
 - **【已解决】** mitmproxy代理报错：Cannot establish TLS with 443 sni None TlsException Cannot validate certificate hostname without SNI
 - **【未解决】** 安卓抓包mitmproxy报错：TlsException SSL handshake Error routines ssl3_get_record wrong version number

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新：2021-01-17 12:43:55

sslv3 alert certificate unknown

mitmdump访问部分url出错:

比如:

某次报错:

```
192.168.31.177:50670: CONNECT 61b5h.com:443
<< Cannot establish TLS with client (sni: 61b5h.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown')])")
```

和

抓包安卓app 现金巴士 时:



对应mitmdump的log:

```
<< Cannot establish TLS with client (sni: app.cashbus.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
```

```
192.168.31.172:54677: clientconnect
192.168.31.172:54677: CONNECT app.cashbus.com:443
<< Cannot establish TLS with client (sni: app.cashbus.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
192.168.31.172:54677: clientdisconnect
```

- 原因

app内部做了certificate pinning 证书固定 的技术

app内部给证书做了指纹, 只允许来自服务器的证书, 匹配后才认为是合法的有效的, 否则就拒绝

即拒绝那些指纹不匹配的证书

- 如何解决
 - 分2种情况:
 - 用 `tls_passthrough.py` 实现部分解决
 - 无法解决

用 `tls_passthrough.py` 实现部分解决

借用别人的脚本:

- [tls_passthrough.py](#)

去:

- 要么直接利用:
 - `mitmproxy -s tls_passthrough.py`
- 要么整理到自己的脚本中:
 - `mitmdump -p 8081 -s Save1.py`

其中: `Save1.py`

```
# -*- coding: utf-8 -*-  
  
import json  
import re  
import os  
import sys  
print("sys.executable=%s" % sys.executable)  
  
class Saver:  
  
    def __init__(self):  
        ...  
  
    def request(self, flow):  
        curReq = flow.request  
        url = curReq.url  
        headers = curReq.headers  
        print("url=%s, headers=%s" % (url, headers))  
        # do what you want  
        # eg: save something to some file  
  
addons = [Saver()]  
  
"""  
This inline script allows conditional TLS Interception based  
on a user-defined strategy.  
Example:  
    > mitmdump -s tls_passthrough.py  
    1. curl --proxy http://localhost:8080 https://example.com --insecure
```

```
// works - we'll also see the contents in mitmproxy
2. curl --proxy http://localhost:8080 https://example.com --insecure
// still works - we'll also see the contents in mitmproxy
3. curl --proxy http://localhost:8080 https://example.com
// fails with a certificate error, which we will also see in mitmproxy
4. curl --proxy http://localhost:8080 https://example.com
// works again, but mitmproxy does not intercept and we do *not* see the contents
Authors: Maximilian Hils, Matthew Tuusberg
"""

import collections
import random

from enum import Enum

import mitmproxy
from mitmproxy import ctx
from mitmproxy.exceptions import TlsProtocolException
from mitmproxy.proxy.protocol import TlsLayer, RawTCPLayer

class InterceptionResult(Enum):
    success = True
    failure = False
    skipped = None

class _TlsStrategy:
    """
    Abstract base class for interception strategies.
    """

    def __init__(self):
        # A server_address -> interception results mapping
        self.history = collections.defaultdict(lambda: collections.deque(maxlen=200))

    def should_intercept(self, server_address):
        """
        Returns:
            True, if we should attempt to intercept the connection.
            False, if we want to employ pass-through instead.
        """
        raise NotImplementedError()

    def record_success(self, server_address):
        self.history[server_address].append(InterceptionResult.success)

    def record_failure(self, server_address):
        self.history[server_address].append(InterceptionResult.failure)

    def record_skipped(self, server_address):
        self.history[server_address].append(InterceptionResult.skipped)

class ConservativeStrategy(_TlsStrategy):
    """
    Conservative Interception Strategy - only intercept if there haven't been any failed a

```

```
ttempts
in the history.
"""

def should_intercept(self, server_address):
    if InterceptionResult.failure in self.history[server_address]:
        return False
    return True

class ProbabilisticStrategy(_TlsStrategy):
    """
    Fixed probability that we intercept a given connection.
    """

    def __init__(self, p):
        self.p = p
        super(ProbabilisticStrategy, self).__init__()

    def should_intercept(self, server_address):
        return random.uniform(0, 1) < self.p

class TlsFeedback(TlsLayer):
    """
    Monkey-patch _establish_tls_with_client to get feedback if TLS could be established
    successfully on the client connection (which may fail due to cert pinning).
    """

    def _establish_tls_with_client(self):
        server_address = self.server_conn.address

        try:
            super(TlsFeedback, self)._establish_tls_with_client()
        except TlsProtocolException as e:
            tls_strategy.record_failure(server_address)
            raise e
        else:
            tls_strategy.record_success(server_address)

# inline script hooks below.

tls_strategy = None

def load(l):
    l.add_option(
        "tlsstrat", int, 0, "TLS passthrough strategy (0-100)",
    )

def configure(updated):
    global tls_strategy
    if ctx.options.tlsstrat > 0:
        tls_strategy = ProbabilisticStrategy(float(ctx.options.tlsstrat) / 100.0)
    else:
        tls_strategy = ConservativeStrategy()
```



```
def next_layer(next_layer):
    """
    This hook does the actual magic - if the next layer is planned to be a TLS layer,
    we check if we want to enter pass-through mode instead.
    """
    if isinstance(next_layer, TlsLayer) and next_layer._client_tls:
        server_address = next_layer.server_conn.address

        if tls_strategy.should_intercept(server_address):
            # We try to intercept.
            # Monkey-Patch the layer to get feedback from the TlsLayer if interception worked.
            next_layer.__class__ = TlsFeedback
        else:
            # We don't intercept - reply with a pass-through layer and add a "skipped" entry.
            mitmproxy.ctx.log("TLS passthrough for %s" % repr(next_layer.server_conn.address), "info")
            next_layer_replacement = RawTCPLayer(next_layer.ctx, ignore=True)
            next_layer.reply.send(next_layer_replacement)
            tls_strategy.record_skipped(server_address)
```

- 效果：至少不报错了

mitmproxy的log会显示相关的 TLS passthrough：

```
TLS passthrough for ('app.cashbus.com', 443)
```

其他（https的？）资源（图片等）类的文件可以正常加载，页面可以显示（图片）等内容了：



- 细节详见
 - 【已解决】提取自动抓包工具中的mitmdump自动保存代理抓包出来的url链接保存到文件
 - 【已解决】mitmproxy代理抓包安卓app数据访问出错：Cannot establish TLS with client sni
TlsException

无法解决

- 彻底的解决办法：修改app的逻辑和规则，允许你（的非法）的证书。
 - 很明显：是别人的app，自己无法修改。所以此处实际上无解
 - 除非你能破解app，重新编译和运行破解后的app，把证书的限制去掉。

另外：此处被测app是一个安卓游戏app，也没有时间去折腾破解app

也没必要：因为最终方案是希望支持无限多的安卓游戏app，所以一个个破解，也不现实不可行。

总之：无解，且放弃

- 相关
 - 安卓破解 Certificate pinning
 - 作者提到了一些关于逆向工程安卓app方面的资料
 - 需要给app打包，用于跳过证书验证，换成自己证书
 - 相关资料：
 - [Android Security: SSL Pinning. Using SSL in an Android app is easy... | by Matthew Dolan | Medium](#)
 - [Bypassing Certificate Pinning on Android for fun and profit | by Felipe Lima | Medium](#)
 - ->
 - [Bypassing SSL Pinning on Android via Reverse Engineering.pdf](#)
 - <https://dl.packetstormsecurity.net/papers/general/android-sslpinning.pdf>
 - 细节详见
 - **【无法解决】** 安卓游戏加了代理后支付页面时mitmdump报错：TlsException SSL handshake error Error SSL routines ssl3_read_bytes sslv3 alert certificate unknown

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

-s 时无法指定python版本

此处

```
mitmdump -s xxx.py
```

中，无法指定加载 `xxx.py` 脚本时，所用的 Python 的版本

-> 会导致，导入一些python库时，即使你Python环境已安装了该库（比如 `pyyaml` ），仍会报错

-> 因为其只用调用（mitmdump所）内置的Python的版本，无法换成当前（Mac）系统中的某个版本的Python

- 细节详见
 - **【无法解决】** Mac中mitmdump通过-s加载python脚本时指定Python版本
 - **【已解决】** mac中Python2和Python3都已安装了yaml但mitmdump -s加载python脚本中导入yaml还是报错
 - **【已解决】** Mac中让mitmdump解析python脚本不用自己内置Python而是用系统Python
 - **【已解决】** Mac中运行mitmdump再次报错：Failed to import yaml
 - **【已解决】** Mac中mitmdump运行命令报错：in script py No module named yaml

crifan.com，使用署名4.0国际(CC BY 4.0)协议发布 all right reserved，powered by Gitbook最后更新：2021-01-17 12:43:55

检测到代理显示异常

有些app、网页等，技术做的相对先进，能自动检测是否有代理：

- 如果检测到有代理
 - 会出现警告
 - 甚至不显示内容
 - 或者显示内容异常
 - 等等
- 对应解决办法：去掉代理
 - 比如切换到没有代理的WiFi



下面总结一下这些异常情况：

安全警告 该网站的安全证书存在问题

安卓手机中安装了mitmproxy代理后，部分app页面（首次打开）会弹框提示证书问题

比如 安卓中的微信的某些页面，第一次访问某些其他网站时，会提示证书问题：

- 【已解决】自动抓包工具适配iOS：安全警告弹框提示该网站的安全证书存在问题

◦

- vivo应用市场登录后，偶尔也有同样弹框

。

点击了继续后，后续就不会再提示。

类似问题：

当你Wifi代理有变动，比如：

- 去掉WiFi的mitmproxy的代理后，重新加上
- 换了一个WiFi，重新加上代理

等等情况，则会被视为第一次使用代理，第一次打开页面时，就仍会出现上述弹框提示。同理，点击继续后，之后不会再提示。

显示空白页面或者只显示部分内容

另外，有些安卓游戏，加了代理后，会导致游戏中和安全相关的，尤其是支付相关页面，会无法正常显示内容。

比如空白页面：



或者是 只能显示部分内容：

底部支付方式没显示：



后来经过多次点击，偶尔才能完整显示内容：



网络异常，请检查网络设置

iOS的app 斑马AI课 会提示：

网络异常，请检查网络设置

请检查您当前的网络环境，如果其他App可以正常使用，请到设置-斑马AI课-无线数据中允许斑马AI课访问网络。检查后，点击重试按钮。



无法连接服务器，请退出重试

对于来自华为应用市场的游戏app，在登录时需要先登录华为应用市场。

当华为应用市场检测到有代理时，就会无法显示，报错：

无法连接服务器，请退出重试




无法连接服务器，请退出重试



解决办法：去掉代理

才能正常加载授权页面：

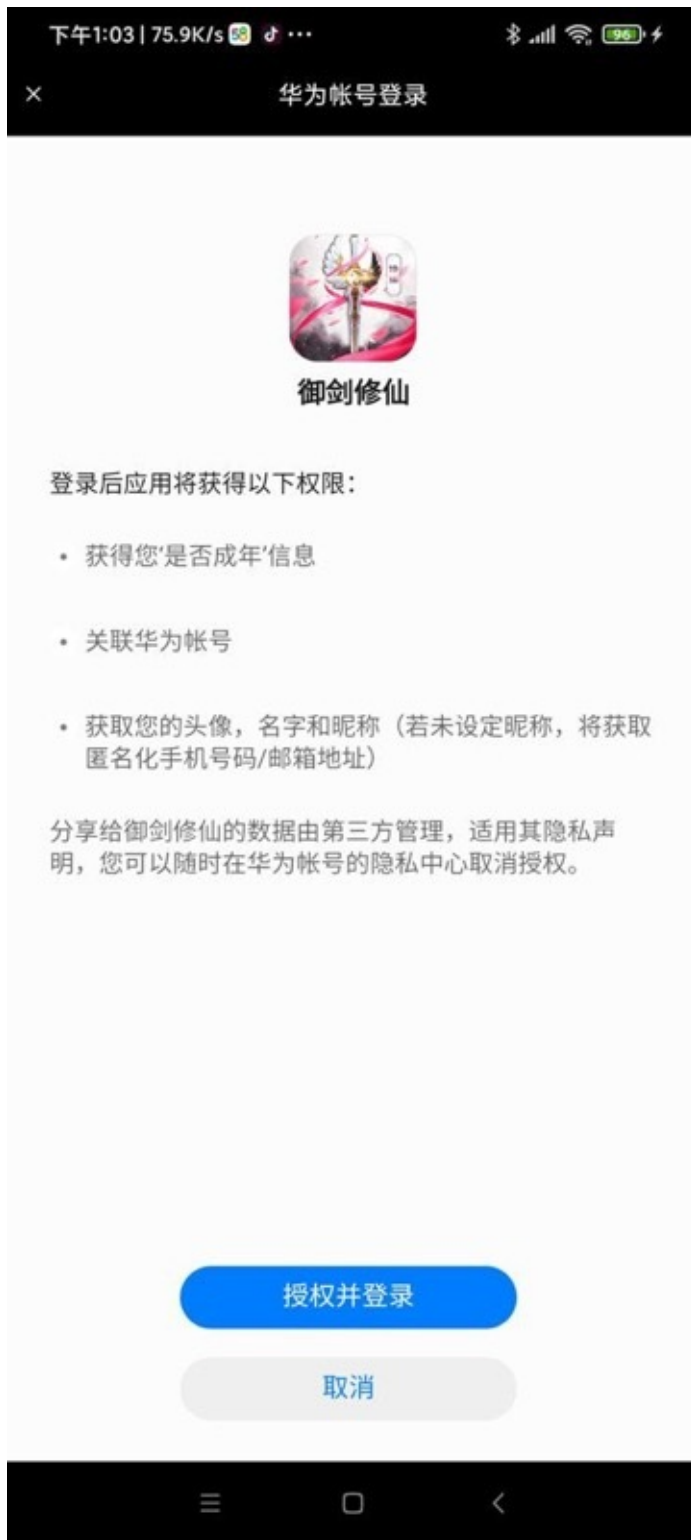




无法加载，请点击重试

偶尔vivo的支付弹框，也会出现，检测到代理后，无法正常显示，提示：

请检查网络或稍后再试

点击重试

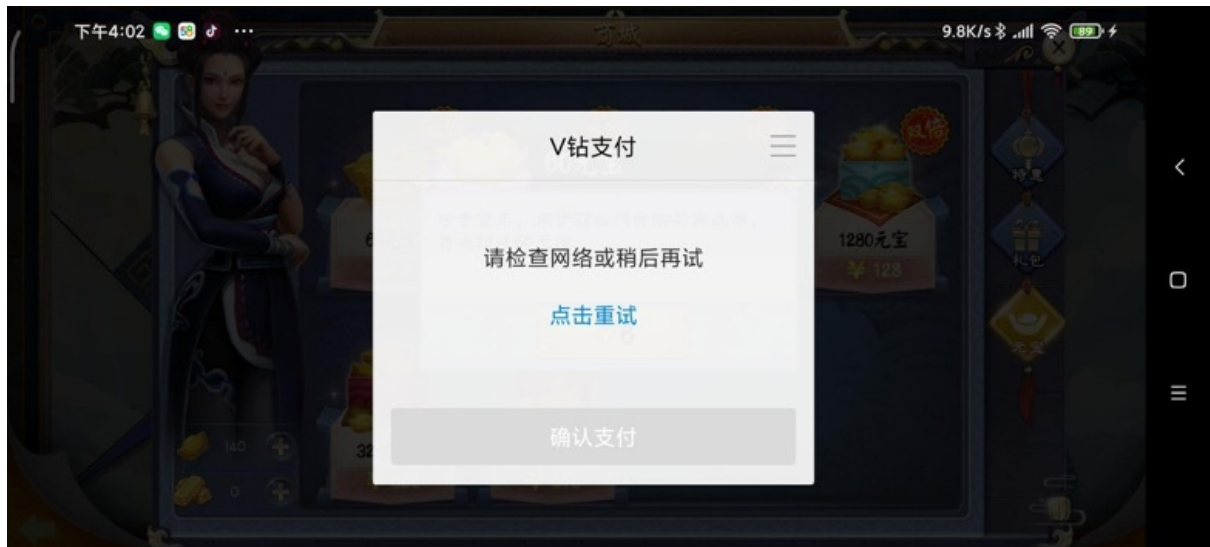

点击一下，即可正常显示：



或者类似的：

加载失败

点击重试




点击一下，即可正常显示支付：




页面卡死在加载中

游戏app发行到vivo应用市场后，登录时往往要登录vivo账号。

其中一种登录弹框时，先显示 滑动补全缺口的图的验证码 的弹框，当vivo发现有代理时，则验证码图片弹框完全就无法显示，且卡死在验证码图片加载页面：

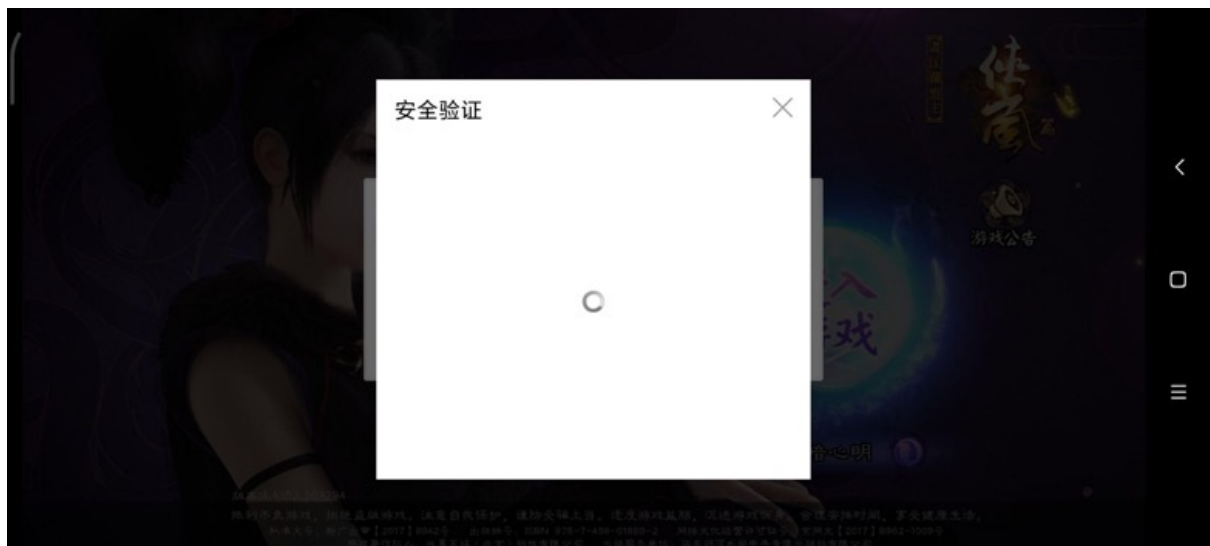

(通过切换WiFi而) 去掉代理后，验证码图片才能正常显示：

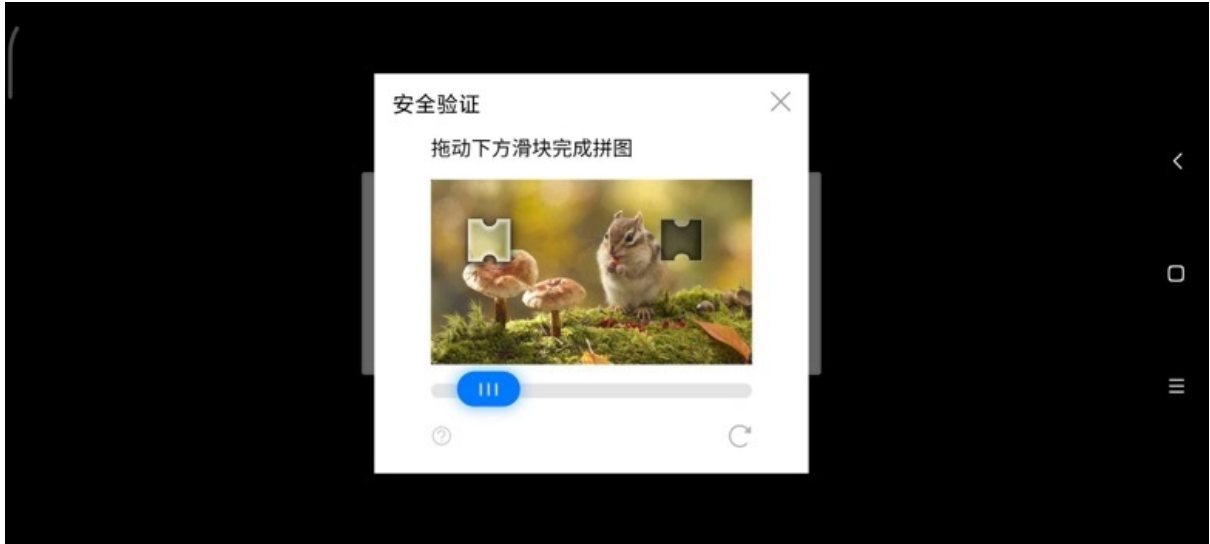

支付方式弹框不显示，显示等待中

某游戏检测到有了代理后，支付弹框不显示，只提示：正在等待支付



请检查网络后，刷新重试！

小米应用市场发行的游戏登录时也需要登录小米账号授权，检测到代理后，会报错：

请检查网络后，刷新重试！



crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

mitmdump偶尔突然无效

- 现象

Mac中正常启动mitmdump:

```
mitmdump -p 8081 -s middleware/Save1.py
```

作为手机中WiFi的代理，一直可以正常工作。

但是最近遇到几次了:

突然，不知道什么原因，mitmdump，就无效了。

导致手机中虽然设置了mitmdump的代理，但是传入mitmdump的脚本无效，无法过滤出url，保存到文件中了。

- 解决办法：切换WiFi

无意间发现：切换WiFi，比如从 xxx_guest 切换到 xxx_guest_5G :



即可解决此问题，mitmdump又重新正常工作了，手机端代理就生效了:

```
Limao@ ~ /dev crawler/appAutoCrawler/AppCrawler master mitmdump -p 8081 -s middleware/Save1.py
sys.executable=/Users/limao/.pyenv/versions/3.8.0/Python.framework/Versions/3.8/bin/python3.8
save url to /Users/limao/dev/crawler/appAutoCrawler/AppCrawler/data/loan/20200512_loan_ShanYouChou/20200512_loan_ShanYouChou_app_iOS.txt
Loading script middleware/Save1.py
Proxy server listening at http://*:8081
192.168.31.59:54438: clientconnect
192.168.31.59:54439: clientconnect
192.168.31.59:54439: GET http://init-p01st.push.apple.com/bag?v=1
<< 200 OK 9.26k
192.168.31.18:39074: clientconnect
192.168.31.59:54438: POST https://me.xdrig.com/v1/5d16f6e7
<< 200 OK 3b
192.168.31.59:54438: clientdisconnect
192.168.31.59:54440: clientconnect
192.168.31.59:54440: POST https://me.xdrig.com/v1/f8a463bf
<< 200 OK 3b
192.168.31.59:54440: clientdisconnect
192.168.31.59:54441: clientconnect
```

后记:

- 手机中: 切换不同的WiFi (再加上代理)
 - 多试试几次, 也可以规避此代理不工作的问题

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

ssl3_get_record wrong version number

- 现象

自动抓包工具抓取安卓app GoFun出行 期间，mitmproxy的log中一直出现：

```
192.168.31.172:37547: CONNECT gofunsa.shouqiev.com:8106
  << Cannot establish TLS with gofunsa.shouqiev.com:8106 (sni: gofunsa.shouqiev.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_get_record', 'wrong version number'])]")
```

```
192.168.31.172:37547: clientconnect
192.168.31.172:37547: CONNECT gofunsa.shouqiev.com:8106
  << Cannot establish TLS with gofunsa.shouqiev.com:8106 (sni: gofunsa.shouqiev.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_get_record', 'wrong version number'])]")
192.168.31.172:37547: clientdisconnect
192.168.31.172:34227: clientconnect
192.168.31.172:34227: GET http://restapi.amap.com/v4/feedback?ts=1573724203119&key=8c6ad4a74b2adf5466da3ad53d35cd28&scode=a5568934b3d7d4b3d10cd511347bbd9f&pname=3dmap
  << 200 OK 171b
```

- 尝试解决

```
openssl s_client -debug -connect gofunsa.shouqiev.com:8106
```

输出有：

```
SSL-Session:
  Protocol  : TLSv1.2
  Cipher    : 0000
  Session-ID:
  Session-ID-ctx:
  Master-Key:
  Start Time: 1573725685
  Timeout   : 7200 (sec)
  Verify return code: 0 (ok)
```

看起来版本没问题，是： TLS v1.2

后来注意到上面输出了：

```
4574582380:error:1400410B:SSL routines:CONNECT_CR_SRVR_HELLO:wrong version number:/BuildRoot/Library/Caches/com.apple.xbs/Sources/libressl/libressl-22.260.1/libressl-2.6/ssl/ssl_pkt.c:386:
```

也说是：

- wrong version number
 - and then try adding flags from this set: `-no_ssl2`, `-no_ssl3` and `-no_tlsl1` (consult the `s_client(1)` manual page for more details) to work out which version of SSL/TLS has to be enabled for the connection to succeed.

另外通过：

```
brew info openssl
openssl: stable 1.0.2t (bottled) [keg-only]
SSL/TLS cryptography library
https://openssl.org/
Not installed
From: https://github.com/Homebrew/homebrew-core/blob/master/Formula/openssl.rb
==> Caveats
A CA file has been bootstrapped using certificates from the SystemRoots
keychain. To add additional certificates (e.g. the certificates added in
the System keychain), place .pem files in
  /usr/local/etc/openssl/certs

and run
  /usr/local/opt/openssl/bin/c_rehash

openssl is keg-only, which means it was not symlinked into /usr/local,
because Apple has deprecated use of OpenSSL in favor of its own TLS and crypto libraries.

==> Analytics
install: 145,281 (30 days), 708,633 (90 days), 5,855,621 (365 days)
install_on_request: 61,384 (30 days), 181,370 (90 days), 877,804 (365 days)
build_error: 0 (30 days)
```

可以看出此处mac安装的openssl的库的版本，是1.0.2t的？

后来：

```
mitmdump --help
```

其中有：

- `--ssl-insecure, -k`
 - Do not verify upstream server SSL/TLS certificates

有空再试试能否解决此问题。

- 细节详见 * [【未解决】安卓抓包mitmproxy报错：TlsException SSL handshake Error routines ssl3_get_record wrong version number](#)

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新：2021-01-17 12:43:55

SysCallError 10054 WSAECONNRESET

- 背景

部分 https=tls=ssl 的url抓包，Mac中正常，但是Windows报错：

```
192.168.31.172:55087: CONNECT store1.hispace.hicloud.com:443
<< Cannot establish TLS with client (sni: store1.hispace.hicloud.com): TlsException("SSL handshake error: SysCallError(10054, 'WSAECONNRESET')")
TLS passthrough for ('tmge.alicdn.com', 443)
192.168.31.172:56214: CONNECT dnkeeper.hicloud.com:443
<< Cannot establish TLS with client (sni: dnkeeper.hicloud.com): TlsException("SSL handshake error: SysCallError(10054, 'WSAECONNRESET')")
TLS passthrough for ('zconfig.alibabauserscontent.com', 443)

192.168.31.172:54363: CONNECT lf.snssdk.com:443
<< Cannot establish TLS with client (sni: lf.snssdk.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
192.168.31.172:52353: CONNECT gecko-h1.snssdk.com:443
<< Cannot establish TLS with client (sni: gecko-h1.snssdk.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
192.168.31.172:42426: CONNECT sf3-ttcdn-tos.pstatp.com:443
<< Cannot establish TLS with client (sni: sf3-ttcdn-tos.pstatp.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
192.168.31.172:36743: CONNECT webcast-h1.amemv.com:443
<< Cannot establish TLS with client (sni: webcast-h1.amemv.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")
```

以及后来的游戏中点击付费按钮，产生的付费链接：

```
Loading script mitmdumpUrlSaver.py
Proxy server listening at http://*:8081

192.168.31.172:57502: CONNECT hm.baidu.com:443
<< Cannot establish TLS with client (sni: hm.baidu.com): TlsException("(-1, 'Unexpected EOF')")

192.168.31.172:40054: CONNECT apiouterh5.37.com:443
<< Cannot establish TLS with client (sni: apiouterh5.37.com): TlsException("SSL handshake error: Error([('SSL routines', 'ssl3_read_bytes', 'sslv3 alert certificate unknown']))")

192.168.31.172:44871: CONNECT apipayh5.37.com:443<< Cannot establish TLS with client (sni: apipayh5.37.com): TlsException("SSL handshake error: SysCallError(10054, 'WSAECONNRESET')")

TLS passthrough for ('apipayh5.37.com', 443)192.168.31.172:36750: clientdisconnect
```




```
192.168.31.172:57503: CONNECT h5.37.com:443 << Cannot establish TLS with client (sni: h5.37.com): TlsException("(-1, 'Unexpected EOF')")
TLS passthrough for ('h5.37.com', 443)

TLS passthrough for ('hm.baidu.com', 443) 192.168.31.172:57505: CONNECT paysdk.37.com:443
<< Cannot establish TLS with client (sni: paysdk.37.com): TlsException("(10054, 'WSAECONNRESET')")

TLS passthrough for ('paysdk.37.com', 443)
```

即, 出现问题:

- 都是TLS passthrough掉了, 保存的txt文件中, 没有这些https的url
- 或者是部分https游戏付费链接 都是SSL handshake error
- 可能的原因
 - windows中此处mitmproxy本身有问题?
 - windows中此处ssl底层库有问题?
 - windows中此处杀毒软件有问题?
 - 因为后来看到有个 联想杀毒plus

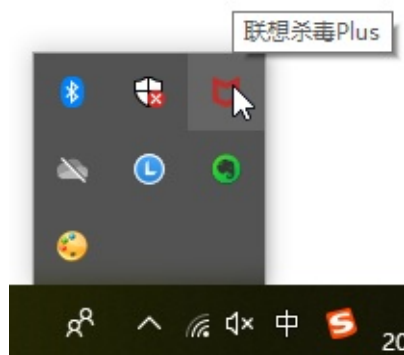

- 不知道对此是否有影响?

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

其他

此处整理一些和 `mitmdump` 相关的其他内容。

crifan.com, 使用[署名4.0国际\(CC BY 4.0\)协议](#)发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

代码调用

- 背景需求

Mac中想要用Python代码去控制 `mitmdump` , 即可以启动和停止 `mitmdump`

问题就转化为, Mac中如何写Python代码, 能够检测到`mitmdump`的进程状态, 如何解析具体信息, 如何杀死对应, `mitmdump`进程等过程。

- 最后代码

```
def stopExistingMitmproxy(curDevId):
    logging.info("curDevId=%s", curDevId)
    curDevIdInt = int(curDevId)
    isCheckCmdRunOk, mitmdumpInfoList = checkMitmdumpStatus()
    logging.info("isCheckCmdRunOk=%s, mitmdumpInfoList=%s", isCheckCmdRunOk, mitmdumpInfoList)
    isRunning = bool(mitmdumpInfoList)
    logging.info("isRunning=%s", isRunning)

    if isCheckCmdRunOk and isRunning:
        foundExistedDevId = False
        existedPid = None

        for eachMitmdumpInfo in mitmdumpInfoList:
            eachDevId = eachMitmdumpInfo["devId"]
            if eachDevId == curDevIdInt:
                foundExistedDevId = True
                existedPid = eachMitmdumpInfo["pid"]
                break

        if foundExistedDevId:
            killOK, errCode = utils.killProcess(existedPid)
            logging.info("killOK=%s, errCode=%s", killOK, errCode)

def debugStartProxy():
    stopExistingMitmproxy(gCurDevId)

    taskFileFullPath = "/Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler/task/191115_card_DongKaKongJian/191115_card_DongKaKongJian_wexin.txt"
    taskId = "5e9552d1c5c2eb3ccdf777bc"
    startTaskProxy(taskId, gCurDevId, taskFileFullPath)

    time.sleep(2)

    isCheckCmdRunOk, mitmdumpInfoList = checkMitmdumpStatus()
    logging.info("isCheckCmdRunOk=%s, mitmdumpInfoList=%s", isCheckCmdRunOk, mitmdumpInfoList)

def checkMitmdumpStatus():
    # check mitmdump is indeed running
```

```

isCheckCmdRunOk, mitmdumpInfoList = False, []
checkMitmdumpCmd = "ps aux | grep mitmdump"
isCheckCmdRunOk, cmdResult = utils.getCommandOutput(checkMitmdumpCmd)
logging.info("isCheckCmdRunOk=%s, cmdResult=%s", isCheckCmdRunOk, cmdResult)
if isCheckCmdRunOk:
    # resultList = cmdResult.split("\n")
    resultList = cmdResult.split(os.linesep)
    logging.info("resultList=%s", resultList)
    # limao          56562    0.0    0.0    4267948    664 s006  R+    5:53下午    0:00.00
grep mitmdump
    # limao          56560    0.0    0.0    4268636    1112 s006  S+    5:53下午    0:00.00
/bin/sh -c ps aux | grep mitmdump
    # limao          55396    0.0    0.1    4381268    11568 s011  S+    5:19下午    0:05.04
/Users/limao/.pyenv/versions/3.8.0/Python.framework/Versions/3.8/Resources/Python.app/Contents/MacOS/Python /Users/limao/.pyenv/versions/3.8.0/bin/mitmdump -p 8081 -s middleware/Save1.py

    if resultList:
        for eachLine in resultList:
            logging.info("eachLine=%s", eachLine)
            mitmdumpP = "^\\s*(?P<username>\\w+)\\s+(?P<pid>\\d+)\\s+\\.+?mitmdump\\s+-p\\s+(?P<port>\\d+)\\s+-s\\s+(?P<scriptId>middleware/Save(?P<devId>\\d+)\\.py)\\s*$"
            foundMitmdump = re.search(mitmdumpP, eachLine)
            logging.info("foundMitmdump=%s", foundMitmdump)
            if foundMitmdump:
                username = foundMitmdump.group("username")
                pid = foundMitmdump.group("pid")
                port = foundMitmdump.group("port")
                devId = foundMitmdump.group("devId")
                scriptFile = foundMitmdump.group("scriptId")
                logging.info("username=%s, pid=%s, port=%s, scriptFile=%s, devId=%s",
username, pid, port, scriptFile, devId)
                curMitmdumpDict = {
                    "username": username,
                    "pid": int(pid),
                    "port": int(port),
                    "scriptId": scriptFile,
                    "devId": int(devId),
                }
                mitmdumpInfoList.append(curMitmdumpDict)
            logging.info("mitmdumpInfoList=%s", mitmdumpInfoList)
        return isCheckCmdRunOk, mitmdumpInfoList

def killProcess(pid):
    """Kill process by pid

    Args:
        pid (id): process ID
    Returns:
    Raises:
    """
    isKillOk, errCode = False, 0
    pidInt = int(pid)
    killCmd = "kill -9 %s" % pidInt

```

```

returnCode = os.system(killCmd)
logging.debug("Command: %s -> returnCode=%s", killCmd, returnCode)
RETURN_CODE_OK = 0
if returnCode == RETURN_CODE_OK:
    isKillOk = True
else:
    errCode = returnCode
return isKillOk, errCode

```

基本完成了想要的功能:

- 在启动任务前, 启动mitmproxy
- 如果之前已有当前设备id的mitmdump在运行, 就kill掉
 - 因为很可能是之前的旧的task的对应的代理, 所以要关闭掉, 再重新启动, 才能传递当前task的data文件
- 然后再去启动mitmproxy, 之后再去检测看看是否的确已启动

后续优化版本

全局定义:

```

MitmdumpPortBase = 8080
curDevId = 1
RunProxyShellFilename = "runProxy.sh"

```

生成mitmproxy命令

```

#----- generate start service command -----
def generateMitmproxyStartCommand(curDevId):
    curMitmdumpPort = MitmdumpPortBase + int(curDevId)
    # mitmproxyStartCommand = "mitmdump -p %d -s middleware/Save%d.py" % (curMitmdumpPort,
    curDevId)
    mitmproxyStartCommand = "mitmdump -k -p %d -s middleware/Save%d.py" % (curMitmdumpPort,
    curDevId)
    logging.debug("mitmproxyStartCommand=%s", mitmproxyStartCommand)
    # mitmdump -k -p 8081 -s middleware/Save1.py
    mitmproxyCommandList = [
        # "cd /Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler",
        "cd %s" % AppCralwerFolder,
        "pwd",
        mitmproxyStartCommand,
    ]
    logging.debug("mitmproxyCommandList=%s", mitmproxyCommandList)
    # ['cd /Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler', 'pwd', 'mitmdump -k -p
    8081 -s middleware/Save1.py']
    # mitmproxyCommandStr = ";".join(mitmproxyCommandList)
    # mitmproxyCommandStr = "; ".join(mitmproxyCommandList)

```

```

mitmproxyCommandStr = "\n".join(mitmproxyCommandList)
# cd /Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler
# pwd
# mitmdump -k -p 8081 -s middleware/Save1.py
logging.debug("mitmproxyCommandStr=%s", mitmproxyCommandStr)
return mitmproxyCommandStr

```

调用:

```
mitmproxyCmdStr = generateMitmproxyStartCommand("1")
```

和此处的:

```

#----- generate shell file -----
def generateRunProxyShell(devId, taskId):
    mitmproxyCmdStr = generateMitmproxyStartCommand(devId)
    logging.debug("mitmproxyCmdStr=%s", mitmproxyCmdStr)
    return generateShellFile(mitmproxyCmdStr, RunProxyShellFilename, taskId)

```

停止当前正在运行的mitmdump

```

def stopExistingMitmproxy(curDevId):
    logging.debug("curDevId=%s", curDevId)
    curDevIdInt = int(curDevId)
    isCheckOk, isRunning, mitmdumpInfoList = detectMitmdumpStatus()
    logging.debug("isCheckOk=%s, isRunning=%s, mitmdumpInfoList=%s", isCheckOk, isRunning,
mitmdumpInfoList)

    if isCheckOk and isRunning:
        foundExistedDevId = False
        existedPidInt = None

        for eachMitmdumpInfo in mitmdumpInfoList:
            eachDevIdStr = eachMitmdumpInfo["devId"]
            eachDevIdInt = int(eachDevIdStr)
            if eachDevIdInt == curDevIdInt:
                foundExistedDevId = True
                existedPidStr = eachMitmdumpInfo["pid"]
                existedPidInt = int(existedPidStr)
                break

        if foundExistedDevId:
            killOK, errCode = utils.killProcess(existedPidInt)
            logging.debug("killOK=%s, errCode=%s", killOK, errCode)

            logging.info("%s to stopped mitmproxy", killOK)

```

调用:

```
devId "1"
stopExistingMitmproxy(devId)
```

确保mitmdump已运行

```
CheckServiceRunningInterval = 2.0

def makesureProxyingRunning(devId, taskId):
    def checkProxyStatus():
        isChecked, isRunning, infoList = detectMitmdumpStatus()
        return isChecked and isRunning

    def startCurTaskProxy():
        startTaskProxy(devId, taskId)

    makesureServiceRunning(checkProxyStatus, startCurTaskProxy, "Proxy")

def detectMitmdumpStatus():
    # crifanli 9428 0.0 0.6 4341956 19792 s006 S+ 9:16上午 0:23.78 /Users/crifanli/.pyenv/versions/3.8.3/bin/python3.8 /Users/crifanli/.pyenv/versions/3.8.3/bin/mitmdump -k -p 8081 -s middleware/Save1.py
    # crifanli 10982 0.0 0.0 4268032 776 s005 S+ 1:51下午 0:00.00 grep mitmdump
    # crifanli 10980 0.0 0.0 4278852 1116 s005 S+ 1:51下午 0:00.01 /bin/sh -c ps aux | grep mitmdump
    # mitmdumpP = "^\\s*(?P<username>\\w+)\\s+(?P<pid>\\d+)\\s+\\.+?mitmdump\\s+(-p\\s+(?P<port>\\d+)\\s+-s\\s+(?P<scriptId>middleware/Save(?P<devId>\\d+)\\.py)\\s*$"
    mitmdumpP = "^\\s*(?P<username>\\w+)\\s+(?P<pid>\\d+)\\s+\\.+?mitmdump\\s+(-k\\s+)?-p\\s+(?P<port>\\d+)\\s+-s\\s+(?P<scriptId>middleware/Save(?P<devId>\\d+)\\.py)\\s*$"
    return utils.grepProcessStatus("mitmdump", mitmdumpP)

def makesureServiceRunning(checkStatusCallback, startServiceCallback, serviceName=""):
    isRunning = False
    while not isRunning:
        # isRunning = eval(checkStatusCallback)
        isRunning = checkStatusCallback()
        logging.debug("isRunning=%s", isRunning)
        if isRunning:
            break
        else:
            logging.info("%s not running, try to start", serviceName)
            # eval(startServiceCallback)
            startServiceCallback()

    logging.info("Wait %d seconds", CheckServiceRunningInterval)
    time.sleep(CheckServiceRunningInterval)

    logging.info("%s is running", serviceName)
```

Mac中调用Terminal终端去启动mitmdump

```
# CurFilePath = __file__
CurFilePath = os.path.abspath(__file__)
print("CurFilePath=%s" % CurFilePath)
PlatformIntegrationFolder = os.path.dirname(CurFilePath)
print("PlatformIntegrationFolder=%s" % PlatformIntegrationFolder)

OutputFolderName = "output"
OutputRootFolder = os.path.join(PlatformIntegrationFolder, OutputFolderName)

def getTaskRootFolder(taskId):
    taskIdStr = str(taskId)
    taskFolder = os.path.join(OutputRootFolder, "tasks", taskIdStr)
    return taskFolder

def getTaskShellFolder(taskId):
    taskRootFolder = getTaskRootFolder(taskId)
    taskShellFolder = os.path.join(taskRootFolder, "shell")
    return taskShellFolder

def startTaskProxy(devId, taskId):
    logging.info("Start proxy for: devId=%s, taskId=%s", devId, taskId)
    proxyShellFile = generateRunProxyShell(devId, taskId)
    logging.debug("proxyShellFile=%s", proxyShellFile)
    utils.launchTerminalRunShellCommand(proxyShellFile)

def generateRunProxyShell(devId, taskId):
    mitmproxyCmdStr = generateMitmproxyStartCommand(devId)
    logging.debug("mitmproxyCmdStr=%s", mitmproxyCmdStr)
    return generateShellFile(mitmproxyCmdStr, RunProxyShellFilename, taskId)

def generateShellFile(fileContentStr, shellFilename, taskId=None):
    """Generate shell file, which is used to run command
    such as
        mitmdump proxy
        crawlerStart.py
        USB port forward
        wda server(xcodebuild/XCode)
    """
    logging.debug("fileContentStr=%s, shellFilename=%s, taskId=%s", fileContentStr, shellFilename, taskId)
    if taskId:
        shellFolder = getTaskShellFolder(taskId)
        # /Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler/platformIntegration/output/tasks/5e9552d1c5c2eb3ccd777bc/shell
    else:
        shellFolder = OutputRootFolder
    logging.debug("shellFolder=%s", shellFolder)
    shellFullPath = os.path.join(shellFolder, shellFilename)
    logging.debug("shellFullPath=%s", shellFullPath)
    # /Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler/platformIntegration/output/tasks/5e9552d1c5c2eb3ccd777bc/shell/runProxy.sh
    shellAbsFullPath = os.path.abspath(shellFullPath)
    logging.debug("shellAbsFullPath=%s", shellAbsFullPath)
```



```

respShellFullPath = shellAbsFullPath
utils.saveTextToFile(respShellFullPath, fileContentStr)
utils.chmodAddX(shellFullPath, isOnlySelf False)
# utils.chmodAddX(respShellFullPath)
logging.debug("respShellFullPath=%s", respShellFullPath)
# /Users/limao/dev/xx/crawler/appAutoCrawler/AppCrawler/platformIntegration/output/tas
ks/5e9552d1c5c2eb3ccdf777bc/shell/runProxy.sh
return respShellFullPath

```

调用到的相关的库函数:

other/common/libs/utils.py

```

import re

#-----
# Process
#-----

def runCommand(consoleCommand):
    """run command using subprocess call"""
    isRunCmdOk = False
    errMsg = "Unknown Error"

    try:
        resultCode = subprocess.check_call(consoleCommand, shell=True)
        if resultCode == 0:
            isRunCmdOk = True
            errMsg = ""
        else:
            isRunCmdOk = False
            errMsg = "%s return code %s" % (consoleCommand, resultCode)
    except subprocess.CalledProcessError as callProcessErr:
        isRunCmdOk = False
        errMsg = str(callProcessErr)
        # "Command 'ffmpeg -y -i /Users/crifan/.../debug/extractAudio/show_112233_video.mp
        4 -ss 00:00:05.359 -to 00:00:06.763 -b:a 128k /.../show_112233_video_000005359_000006763.m
        p3 2> /dev/null' returned non-zero exit status 1."

    return isRunCmdOk, errMsg

def getCommandOutput(consoleCommand, consoleOutputEncoding="utf-8"):
    """
        get command output from terminal
    """
    # print("getCommandOutput: consoleCommand=%s" % consoleCommand)
    isRunCmdOk = False
    consoleOutput = ""
    try:
        # consoleOutputByte = subprocess.check_output(consoleCommand)

        consoleOutputByte = subprocess.check_output(consoleCommand, shell=True)
    
```

```

# commandPartList = consoleCommand.split(" ")
# print("commandPartList=%s" % commandPartList)
# consoleOutputByte = subprocess.check_output(commandPartList)
# print("type(consoleOutputByte)=%s" % type(consoleOutputByte)) # <class 'bytes'>
# print("consoleOutputByte=%s" % consoleOutputByte) # b'640x360\n'

consoleOutput = consoleOutputByte.decode(consoleOutputEncoding) # '640x360\n'
consoleOutput = consoleOutput.strip() # '640x360'
isRunCmdOk = True
except subprocess.CalledProcessError as callProcessErr:
    cmdErrStr = str(callProcessErr)
    print("Error %s for run command %s" % (cmdErrStr, consoleCommand))

# print("isRunCmdOk=%s, consoleOutput=%s" % (isRunCmdOk, consoleOutput))
return isRunCmdOk, consoleOutput

def launchTerminalRunShellCommand(shellFile, isForceNewInstance=True, isUseiTerm2=False):
    """in Mac, Launch terminal(Mac Terminal / iTerm2) and execute shell file, which contain
    n command to run

    Args:
        shellFile (str): shell file full path
        isUseiTerm2 (bool): True to use iTerm2, False to use Mac builtin Terminal
        isForceNewInstance (bool): whether pass -n to open, which means: Open a new instance
    ce of the application even if one is already running
    Returns:
    Raises:
    """
    logging.debug("shellFile=%s, isForceNewInstance=%s, isUseiTerm2=%s", shellFile, isForceNewInstance, isUseiTerm2)

    TerminalApp_iTerm2 = '/Applications/iTerm.app'
    TerminalApp_Terminal = 'Terminal'
    if isUseiTerm2:
        terminalApp = TerminalApp_iTerm2
    else:
        terminalApp = TerminalApp_Terminal

    cmdList = [
        "/usr/bin/open",
    ]

    if isForceNewInstance:
        cmdList.append("-n")

    extarArgs = shellFile
    restCmdList = [
        "-a",
        terminalApp,
        "--args",
        extarArgs,
    ]
    cmdList.extend(restCmdList)

```

```

logging.debug("cmdList=%s" % cmdList)

curProcess = subprocess.Popen(cmdList, stdin=subprocess.PIPE, stdout=subprocess.PIPE)
logging.debug("curProcess=%s" % curProcess)

returnCode = None
while True:
    returnCode = curProcess.poll()
    logging.debug("returnCode=%s", returnCode)
    if returnCode is not None:
        logging.debug("subprocess end: returnCode=%s", returnCode)
        break
    time.sleep(0.5)

logging.debug("Final returnCode=%s", returnCode)
logging.debug("Complete launch %s and run shell %s", terminalApp, shellFile)

def killProcess(pid):
    """Kill process by pid

    Args:
        pid (int): process ID
    Returns:
    Raises:
    """
    isKillOk, errCode = False, 0
    pidInt = int(pid)
    killCmd = "kill -9 %s" % pidInt
    returnCode = os.system(killCmd)
    logging.debug("Command: %s -> returnCode=%s", killCmd, returnCode)
    RETURN_CODE_OK = 0
    if returnCode == RETURN_CODE_OK:
        isKillOk = True
    else:
        errCode = returnCode
    return isKillOk, errCode

def grepProcessStatus(processFile, singleLinePattern, psCmd="ps aux"):
    """grep process info status from ps output

    Args:
        processFile (str): process file name
        singleLinePattern (str): single process line search pattern
        psCmd (str): ps command, default: ps aux
    Returns:
    Raises:
    Examples:
        input: "crawlerStart.py", "^\\s*(?P<username>\\w+)\\s+(?P<pid>\\d+)\\s+\\.+?python\\s+crawlerStart\\.py\\s+-task\\s+(?P<taskFile>\\S+)\\s+-id\\s+(?P<curDevId>\\d+)$"
        output: [{'username': 'limao', 'pid': '64320', 'taskFile': '/Users/limao/dev/xxx/crawler/appAutoCrawler/AppCrawler/task/191115_card_DongKaKongJian/191115_card_DongKaKongJian_wexin.txt', 'curDevId': '1'}]
    """

```

```

logging.debug("processFile=%s, singleLinePattern=%s", processFile, singleLinePattern)
isCheckCmdRunOk, isRunning, processInfoList = False, False, []

groupNameList = re.findall("\\(\\?P<(\\w+)>", singleLinePattern)
logging.debug("groupNameList=%s", groupNameList)
# groupNameList=['username', 'pid', 'port', 'scriptFile', 'devId']
grepProcessCmd = "%s | grep %s" % (psCmd, processFile)
logging.debug("grepProcessCmd=%s", grepProcessCmd)
isCheckCmdRunOk, cmdResult = getCommandOutput(grepProcessCmd)
logging.debug("isCheckCmdRunOk=%s, cmdResult=%s", isCheckCmdRunOk, cmdResult)
if isCheckCmdRunOk:
    # lineSeparator = "\n"
    lineSeparator = os.linesep
    resultList = cmdResult.split(lineSeparator)
    logging.debug("resultList=%s", resultList)
    # limao          56562    0.0    0.0    4267948    664 s006 R+    5:53下午    0:00.00
grep mitmdump
    # limao          56560    0.0    0.0    4268636    1112 s006 S+    5:53下午    0:00.00
/bin/sh -c ps aux | grep mitmdump
    # limao          55396    0.0    0.1    4381268    11568 s011 S+    5:19下午    0:05.04
/Users/limao/.pyenv/versions/3.8.0/Python.framework/Versions/3.8/Resources/Python.app/Contents/MacOS/Python /Users/limao/.pyenv/versions/3.8.0/bin/mitmdump -p 8081 -s middleware/Save1.py
    if resultList:
        for eachLine in resultList:
            logging.debug("eachLine=%s", eachLine)
            foundProcess = re.search(singleLinePattern, eachLine)
            logging.debug("foundProcess=%s", foundProcess)
            if foundProcess:
                curProcessInfoDict = {}
                for eachKey in groupNameList:
                    curValue = foundProcess.group(eachKey)
                    curProcessInfoDict[eachKey] = curValue
                logging.debug("curProcessInfoDict=%s", curProcessInfoDict)
                processInfoList.append(curProcessInfoDict)

isRunning = bool(processInfoList)
logging.debug("isRunning=%s, processInfoList=%s", isRunning, processInfoList)
return isCheckCmdRunOk, isRunning, processInfoList

```

注:

相关库文件的最新版, 详见:

- <https://github.com/crifan/crifanLibPython/blob/master/python3/crifanLib/crifanSystem.py>
 - `grepProcessStatus`
 - `killProcess`
 - `launchTerminalRunShellCommand`
 - `getCommandOutput`
 - `runCommand`

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更

新: 2021-01-17 12:43:55

打包exe

windows 中用 PyInstaller 打包 python 脚本为exe文件

其中python脚本调用到 mitmdump

可以理解为：打包mitmdump的Python为exe

核心命令：

```
pyinstaller pymitmdump\mitmdumpStartApi.py --distpath pymitmdumpstartdist --add-data "pymitmdump\mitmdump_executable;mitmdump_executable" --add-data "pymitmdump\mitmdumpUriSaver.py;j."
```

```
pyinstaller pymitmdump\mitmdumpOtherApi.py --distpath pymitdumpotherdist
```

可以生成2个exe文件。

- 细节详见：[【已解决】 windows中用PyInstaller打包mitmdump的Python脚本为exe](#)

crifan.com, 使用[署名4.0国际\(CC BY 4.0\)协议](#)发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

附录

下面列出相关参考资料。

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

help语法

mitmdump --help

```

mitmdump --help
usage: mitmdump [options] [filter]

positional arguments:
  filter_args          Filter expression, equivalent to setting both the view_filter and
save_stream_filter options.

optional arguments:
  -h, --help          show this help message and exit
  --version           show version number and exit
  --options           Show all options and their default values
  --commands         Show all commands and their signatures
  --set option[ value] Set an option. When the value is omitted, booleans are set to true
, strings and integers are set to None (if permitted),
and sequences are emptied. Boolean values can be true, false or to
ggle.
  -q, --quiet        Quiet.
  -v, --verbose      Increase log verbosity.
  --mode MODE, -m MODE Mode can be "regular", "transparent", "socks5", "reverse:SPEC", or
"upstream:SPEC". For reverse and upstream proxy modes,
SPEC is host specification in the form of "http[s]://host[:port]".
  --no-anticache
  --anticache        Strip out request headers that might cause the server to return 30
4-not-modified.
  --no-showhost
  --showhost         Use the Host header to construct URLs for display.
  --rfile PATH, -r PATH
                    Read flows from file.
  --scripts SCRIPT, -s SCRIPT
                    Execute a script. May be passed multiple times.
  --stickycookie FILTER
                    Set sticky cookie filter. Matched against requests.
  --stickyauth FILTER
                    Set sticky auth filter. Matched against requests.
  --save-stream-file PATH, -w PATH
                    Stream flows to file as they arrive. Prefix path with + to append.
  --no-anticmp
  --anticmp          Try to convince servers to send us un-compressed data.
  --flow-detail LEVEL
                    The display detail level for flows in mitmdump: 0 (almost quiet) t
o 3 (very verbose). 0: shortened request URL, response
status code, WebSocket and TCP message notifications. 1: full requ
est URL with response status code 2: 1 + HTTP headers 3:
2 + full response content, content of WebSocket and TCP messages.

Proxy Options:
  --listen-host HOST Address to bind proxy to.
  --listen-port PORT, -p PORT

```


Proxy **service** port.

--no-server, -n
--server Start a proxy server. Enabled by default.

--ignore-hosts HOST Ignore **host** and forward all traffic without processing it. In transparent mode, it is recommended to use an IP address (**range**), not the hostname. In regular mode, only SSL traffic is ignored and the **hostname** should be used. The supplied **value** is interpreted as a regular expression and matched on the **ip** or the hostname. May be passed multiple times.

--allow-hosts HOST Opposite of **--ignore-hosts**. May be passed multiple times.

--tcp-hosts HOST Generic TCP SSL proxy mode **for** all hosts that match the pattern. Similar to **--ignore**, but SSL connections are intercepted. The communication contents are printed to the log **in** verbose mode. May be passed multiple times.

--upstream-auth USER:PASS
 Add HTTP Basic authentication to upstream proxy and reverse proxy requests. Format: **username:password**.

--proxyauth SPEC Require proxy authentication. Format: **"username:pass"**, **"any"** to accept any user/pass combination, **"@path"** to use an Apache **htpasswd** file, or **"ldap[s]:url_server_ldap:dn_auth:password:dn_subtree"** for LDAP authentication.

--no-rawtcp
--rawtcp Enable/disable experimental raw TCP support. TCP connections starting with non-ascii bytes are treated as **if** they would match **tcp_hosts**. The heuristic is very rough, use with caution. Disabled by default.

--no-http2
--http2 Enable/disable HTTP/2 support. HTTP/2 support is enabled by default.

SSL:

--certs SPEC SSL certificates of the form **"[domain=]path"**. The domain may include a wildcard, and is equal to **"*"** if not specified. The **file** at path is a certificate **in** PEM format. If a private key is included **in** the PEM, it is used, **else** the default key **in** the conf **dir** is used. The PEM **file** should contain the full certificate chain, with the leaf certificate as the first entry. May be passed multiple times.

--no-ssl-insecure
--ssl-insecure, -k Do not verify upstream server SSL/TLS certificates.
--key-size KEY_SIZE TLS key size **for** certificates and CA.

Client Replay:

--client-replay PATH, -C PATH
 Replay client requests from a saved file. May be passed multiple times.

Server Replay:

--server-replay PATH, -S PATH
 Replay server responses from a saved file. May be passed multiple times.

--no-server-replay-kill-extra
--server-replay-kill-extra

```

Kill extra requests during replay.
--no-server-replay-nopop
--server-replay-nopop
    Don't remove flows from server replay state after use. This makes
it possible to replay same response multiple times.
--no-server-replay-refresh
--server-replay-refresh
    Refresh server replay responses by adjusting date, expires and las
t-modified headers, as well as adjusting cookie
    expiration.

Replacements:
--replacements PATTERN, -R PATTERN
    Replacement patterns of the form "/pattern/regex/replacement", whe
re the separator can be any character. May be passed
    multiple times.

Set Headers:
--setheaders PATTERN, -H PATTERN
    Header set pattern of the form "/pattern/header/value", where the
separator can be any character. May be passed multiple
    times.

```

mitmproxy --help

```

mitmproxy --help
usage: mitmproxy [options]

optional arguments:
  -h, --help            show this help message and exit
  --version             show version number and exit
  --options             Show all options and their default values
  --commands           Show all commands and their signatures
  --set option[ value] Set an option. When the value is omitted, booleans are set to true
, strings and integers are set to None (if permitted),
and sequences are emptied. Boolean values can be true, false or to
ogle.
  -q, --quiet          Quiet.
  -v, --verbose        Increase log verbosity.
  --mode MODE, -m MODE Mode can be "regular", "transparent", "socks5", "reverse:SPEC", or
"upstream:SPEC". For reverse and upstream proxy modes,
SPEC is host specification in the form of "http[s]://host[:port]".
  --no-anticache
  --anticache          Strip out request headers that might cause the server to return 30
4-not-modified.
  --no-showhost
  --showhost           Use the Host header to construct URLs for display.
  --rfile PATH, -r PATH
                       Read flows from file.
  --scripts SCRIPT, -s SCRIPT

```

```

Execute a script. May be passed multiple times.
--stickycookie FILTER
    Set sticky cookie filter. Matched against requests.
--stickyauth FILTER
    Set sticky auth filter. Matched against requests.
--save-stream-file PATH, -w PATH
    Stream flows to file as they arrive. Prefix path with + to append.
--no-anticomp
--anticomp
    Try to convince servers to send us un-compressed data.
--console-layout {horizontal,single,vertical}
    Console layout.
--no-console-layout-headers
--console-layout-headers
    Show layout component headers

Proxy Options:
--listen-host HOST
    Address to bind proxy to.
--listen-port PORT, -p PORT
    Proxy service port.
--no-server, -n
--server
    Start a proxy server. Enabled by default.
--ignore-hosts HOST
    Ignore host and forward all traffic without processing it. In tran
    sparent mode, it is recommended to use an IP address
    (range), not the hostname. In regular mode, only SSL traffic is ig
    nored and the hostname should be used. The supplied
    value is interpreted as a regular expression and matched on the ip
    or the hostname. May be passed multiple times.
--allow-hosts HOST
    Opposite of --ignore-hosts. May be passed multiple times.
--tcp-hosts HOST
    Generic TCP SSL proxy mode for all hosts that match the pattern. S
    imilar to --ignore, but SSL connections are intercepted.
    The communication contents are printed to the log in verbose mode.
    May be passed multiple times.
--upstream-auth USER:PASS
    Add HTTP Basic authentication to upstream proxy and reverse proxy
    requests. Format: username:password.
--proxyauth SPEC
    Require proxy authentication. Format: "username:pass", "any" to ac
    cept any user/pass combination, "@path" to use an Apache
    htpasswd file, or "ldap[s]:url_server_ldap:dn_auth:password:dn_sub
    tree" for LDAP authentication.
--no-rawtcp
--rawtcp
    Enable/disable experimental raw TCP support. TCP connections start
    ing with non-ascii bytes are treated as if they would
    match tcp_hosts. The heuristic is very rough, use with caution. Di
    sabled by default.
--no-http2
--http2
    Enable/disable HTTP/2 support. HTTP/2 support is enabled by default.

SSL:
--certs SPEC
    SSL certificates of the form "[domain=]path". The domain may inclu
    de a wildcard, and is equal to "*" if not specified. The
    file at path is a certificate in PEM format. If a private key is i
    ncluded in the PEM, it is used, else the default key in
    the conf dir is used. The PEM file should contain the full certifi

```

```

cate chain, with the leaf certificate as the first
entry. May be passed multiple times.
--no-ssl-insecure
--ssl-insecure, -k Do not verify upstream server SSL/TLS certificates.
--key-size KEY_SIZE TLS key size for certificates and CA.

Client Replay:
--client-replay PATH, -C PATH
Replay client requests from a saved file. May be passed multiple t
imes.

Server Replay:
--server-replay PATH, -S PATH
Replay server responses from a saved file. May be passed multiple
times.
--no-server-replay-kill-extra
--server-replay-kill-extra
Kill extra requests during replay.
--no-server-replay-nopop
--server-replay-nopop
Don't remove flows from server replay state after use. This makes
it possible to replay same response multiple times.
--no-server-replay-refresh
--server-replay-refresh
Refresh server replay responses by adjusting date, expires and las
t-modified headers, as well as adjusting cookie
expiration.

Replacements:
--replacements PATTERN, -R PATTERN
Replacement patterns of the form "/pattern/regex/replacement", whe
re the separator can be any character. May be passed
multiple times.

Set Headers:
--setheaders PATTERN, -H PATTERN
Header set pattern of the form "/pattern/header/value", where the
separator can be any character. May be passed multiple
times.

Filters:
See help in mitmproxy for filter expression syntax.

--intercept FILTER Intercept filter expression.
--view-filter FILTER Limit the view to matching flows.

```

mitmweb --help

```

mitmweb --help
usage: mitmweb [options]

```

optional arguments:

-h, --help show this help message and exit
 --version show version number and exit
 --options Show all options and their default values
 --commands Show all commands and their signatures
 --set option[value] Set an option. When the value is omitted, booleans are set to true, strings and integers are set to None (if permitted), and sequences are emptied. Boolean values can be true, false or toggle.

-q, --quiet Quiet.
 -v, --verbose Increase log verbosity.
 --mode MODE, -m MODE Mode can be "regular", "transparent", "socks5", "reverse:SPEC", or "upstream:SPEC". For reverse and upstream proxy modes, SPEC is host specification in the form of "http[s]://host[:port]".

--no-anticache
 --anticache Strip out request headers that might cause the server to return 304-not-modified.
 --no-showhost
 --showhost Use the Host header to construct URLs for display.
 --rfile PATH, -r PATH Read flows from file.
 --scripts SCRIPT, -s SCRIPT Execute a script. May be passed multiple times.
 --stickycookie FILTER Set sticky cookie filter. Matched against requests.
 --stickyauth FILTER Set sticky auth filter. Matched against requests.
 --save-stream-file PATH, -w PATH Stream flows to file as they arrive. Prefix path with + to append.
 --no-anticomp
 --anticomp Try to convince servers to send us un-compressed data.

Mitmweb:

--no-web-open-browser
 --web-open-browser Start a browser.
 --web-port PORT Web UI port.
 --web-iface INTERFACE Web UI interface.

Proxy Options:

--listen-host HOST Address to bind proxy to.
 --listen-port PORT, -p PORT Proxy service port.
 --no-server, -n
 --server Start a proxy server. Enabled by default.
 --ignore-hosts HOST Ignore host and forward all traffic without processing it. In transparent mode, it is recommended to use an IP address (range), not the hostname. In regular mode, only SSL traffic is ignored and the hostname should be used. The supplied value is interpreted as a regular expression and matched on the ip or the hostname. May be passed multiple times.
 --allow-hosts HOST Opposite of --ignore-hosts. May be passed multiple times.
 --tcp-hosts HOST Generic TCP SSL proxy mode for all hosts that match the pattern. S

imilar to --ignore, but SSL connections are intercepted.
 The communication contents are printed to the log in verbose mode.
 May be passed multiple times.

--upstream-auth USER:PASS
 Add HTTP Basic authentication to upstream proxy and reverse proxy requests. Format: username:password.

--proxyauth SPEC Require proxy authentication. Format: "username:pass", "any" to accept any user/pass combination, "@path" to use an Apache htpasswd file, or "ldap[s]:url_server_ldap:dn_auth:password:dn_subtree" for LDAP authentication.

--no-rawtcp
 --rawtcp Enable/disable experimental raw TCP support. TCP connections starting with non-ascii bytes are treated as if they would match tcp_hosts. The heuristic is very rough, use with caution. Disabled by default.

--no-http2
 --http2 Enable/disable HTTP/2 support. HTTP/2 support is enabled by default.

SSL:

--certs SPEC SSL certificates of the form "[domain=]path". The domain may include a wildcard, and is equal to "*" if not specified. The file at path is a certificate in PEM format. If a private key is included in the PEM, it is used, else the default key in the conf dir is used. The PEM file should contain the full certificate chain, with the leaf certificate as the first entry. May be passed multiple times.

--no-ssl-insecure
 --ssl-insecure, -k Do not verify upstream server SSL/TLS certificates.
 --key-size KEY_SIZE TLS key size for certificates and CA.

Client Replay:

--client-replay PATH, -C PATH
 Replay client requests from a saved file. May be passed multiple times.

Server Replay:

--server-replay PATH, -S PATH
 Replay server responses from a saved file. May be passed multiple times.

--no-server-replay-kill-extra
 --server-replay-kill-extra
 Kill extra requests during replay.

--no-server-replay-nopop
 --server-replay-nopop
 Don't remove flows from server replay state after use. This makes it possible to replay same response multiple times.

--no-server-replay-refresh
 --server-replay-refresh
 Refresh server replay responses by adjusting date, expires and last-modified headers, as well as adjusting cookie expiration.

Replacements:

--replacements PATTERN, -R PATTERN

Replacement patterns of the form `"/pattern/regex/replacement"`, where the separator can be any character. May be passed multiple times.

Set Headers:

--setheaders PATTERN, -H PATTERN

Header **set** pattern of the form `"/pattern/header/value"`, where the separator can be any character. May be passed multiple times.

Filters:

See [help in mitmproxy](#) for filter expression syntax.

--intercept FILTER Intercept filter expression.

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55

参考资料

- 【已解决】Mac中安装Mitmdump和启动服务
- 【基本解决】Mac中mitmdump运行命令报错：in script py No module named yaml
- 【未解决】windows中pip安装mitmproxy报错：build _openssl.c error C2065 X509_V_FLAG_CB_ISSUER_CHECK undeclared identifier
- 【未解决】windows中pip install mitmproxy失败：ERROR Could not build wheels for cryptography which use PEP 517 and cannot be installed directly
- 【已解决】iPhone8P中安装mitmproxy的CA的ssl证书
- 【已解决】给iPhone添加mitmproxy的mitmdump代理用于保存抓包链接到文件
- 【记录】给安卓手机中安装mitmproxy代理的SSL证书
- 【记录】给自动抓包工具的安卓手机设置mitmproxy代理用于能抓包到链接地址
- 【已解决】安卓手机小米9中安装mitmproxy的SSL代理证书
- 【无需解决】小米9中WLAN或WAPI证书中找不到mitmproxy的SSL的pem证书文件
- 【无法解决】小米9中用ES文件管理器安装pem证书
- 【无法解决】红米Note8Pro中用微信或小米浏览器下载mitmproxy的SSL代理证书
- 【已解决】红米Note8Pro中用QQ浏览器下载mitmproxy的Android的SSL代理证书
- 【已解决】红米10X安卓手机中无法下载mitmproxy的证书文件
- 【已解决】给安卓手机ViVo的iQOO U1x下载和安装mitmproxy的SSL代理证书
- 【已解决】安卓手机Vivo的iQOO U1x中手动安装mitmproxy-ca-cert.pem证书文件
- 【已解决】安卓手机Vivo的iQOO U1x中点击安装mitmproxy的pem证书报错：未找到证书文件
- 【未解决】给安卓手机Vivo的iQOO U1x初始化mitmdump的代理环境
- 【已解决】给VMWare中macOS中抓包项目开启mitmdump代理
- 【已解决】红米Note8Pro中去下载mitmproxy证书提示：if you can see this, traffic is not passing through mitmproxy
- 【已解决】windows中用PyInstaller打包mitmdump的Python脚本为exe
- 【已解决】自动抓包平台化：Python调用命令行启动mitmproxy代理
- 【已解决】用自动处理任务脚本启动自动测试工具测试自动化安卓游戏
- 【已解决】Mac中用Python检测mitmdump进程状态和杀死原有进程
- 【已解决】Python中实现检测mitmdump进程服务的状态
- 【已解决】mitmproxy代理报错：Cannot establish TLS with 443 sni None TlsException Cannot validate certificate hostname without SNI
- 【无法解决】安卓游戏加了代理后支付页面时mitmdump报错：TlsException SSL handshake error Error SSL routines ssl3_read_bytes sslv3 alert certificate unknown
- 【未解决】windows中用mitmproxy无法抓包部分http付费链接
- 【未解决】安卓抓包mitmproxy报错：TlsException SSL handshake Error routines ssl3_get_record wrong version number
- 【无法解决】Mac中mitmdump通过-s加载python脚本时指定Python版本
- 【已解决】mac中Python2和Python3都已安装了yaml但mitmdump -s加载python脚本中导入yaml还是报错
- 【已解决】Mac中让mitmdump解析python脚本不用自己内置Python而是用系统Python
- 【已解决】Mac中运行mitmdump再次报错：Failed to import yaml

- 【已解决】Mac中mitmdump运行命令报错: in script py No module named yaml
- 【已解决】自动化测试安卓游戏烈焰龙城: 从主页到带支付的真正支付页面
- 【已解决】自动化测试安卓游戏烈焰龙城: 优化是否是支付页面以及点击支付出现支付弹框的逻辑
- 【已解决】给VMWare中macOS中抓包项目开启mitmdump代理
- 【已解决】提取自动抓包工具中的mitmdump自动保存代理抓包出来的url链接保存到文件
-
- [Android Security: SSL Pinning. Using SSL in an Android app is easy... | by Matthew Dolan | Medium](#)
- [Bypassing Certificate Pinning on Android for fun and profit | by Felipe Lima | Medium](#)
- [Bypassing SSL Pinning on Android via Reverse Engineering.pdf](#)
- <https://dl.packetstormsecurity.net/papers/general/android-sslpinning.pdf>
- [mitmproxy/tls_passthrough.py at master · mitmproxy/mitmproxy](#)
- [Mitmproxy教程 - zha0gongz1 - 博客园](#)

crifan.com, 使用署名4.0国际(CC BY 4.0)协议发布 all right reserved, powered by Gitbook最后更新: 2021-01-17 12:43:55